


MQD (Miniature QDS) Connectors

General Description


Delta MQD (Miniature QDS) connectors feature the same positive-locking, push-on mating as QDS series connectors, but in a miniature size equivalent to BNC and TNC connectors. Along with the convenience of quick-connect and quick-disconnect mating, they exhibit good VSWR to 9 GHz.

Our MiniQDS series product line is still growing, so please call if you don't see what you need.

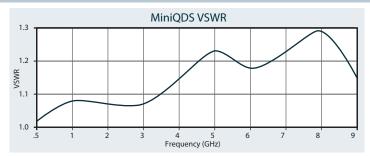

Contact factory for other specifications and interface dimensions.

Straight Plug - Crimp Type For Flexible Cable




	Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/
			А	В	Body	Contact	Della P/N	Trim Code
	6	1	1.05	.500	Albaloy*	Gold	4203015Q000-000	B/23

^{*} Crimp sleeve is nickel plated.

Panel Jack Receptacle - Square Flange

Figure 1 (Solder pot contact)



Also available with other contact/insulator configurations and flange sizes

Figuro	Dimensions				Mounting	Plating		Delta P/N
Figure	Α	В	С	D	Figure	Body	Contact	Delta P/N
1	1.06	.630	.062	.090	07	Albaloy	Gold (C)	4213000Q071-001

Adapter Between Series

Figure 1 (MiniQDS jack to TNC jack)




Figure	Dime	nsions	Pla	ting	Delta P/N
	А	В	Body	Contact	
1	1.28	.436	Albaloy	Gold (C)	2234000Q001-136

- See page 209 for cable groups. Assembly procedures start on page 210. See page 208 for mounting dimensions.
 - (C) in contact plating column indicates captive contact.
- See page 6 for alternate body plating information.