




1001-043-N001

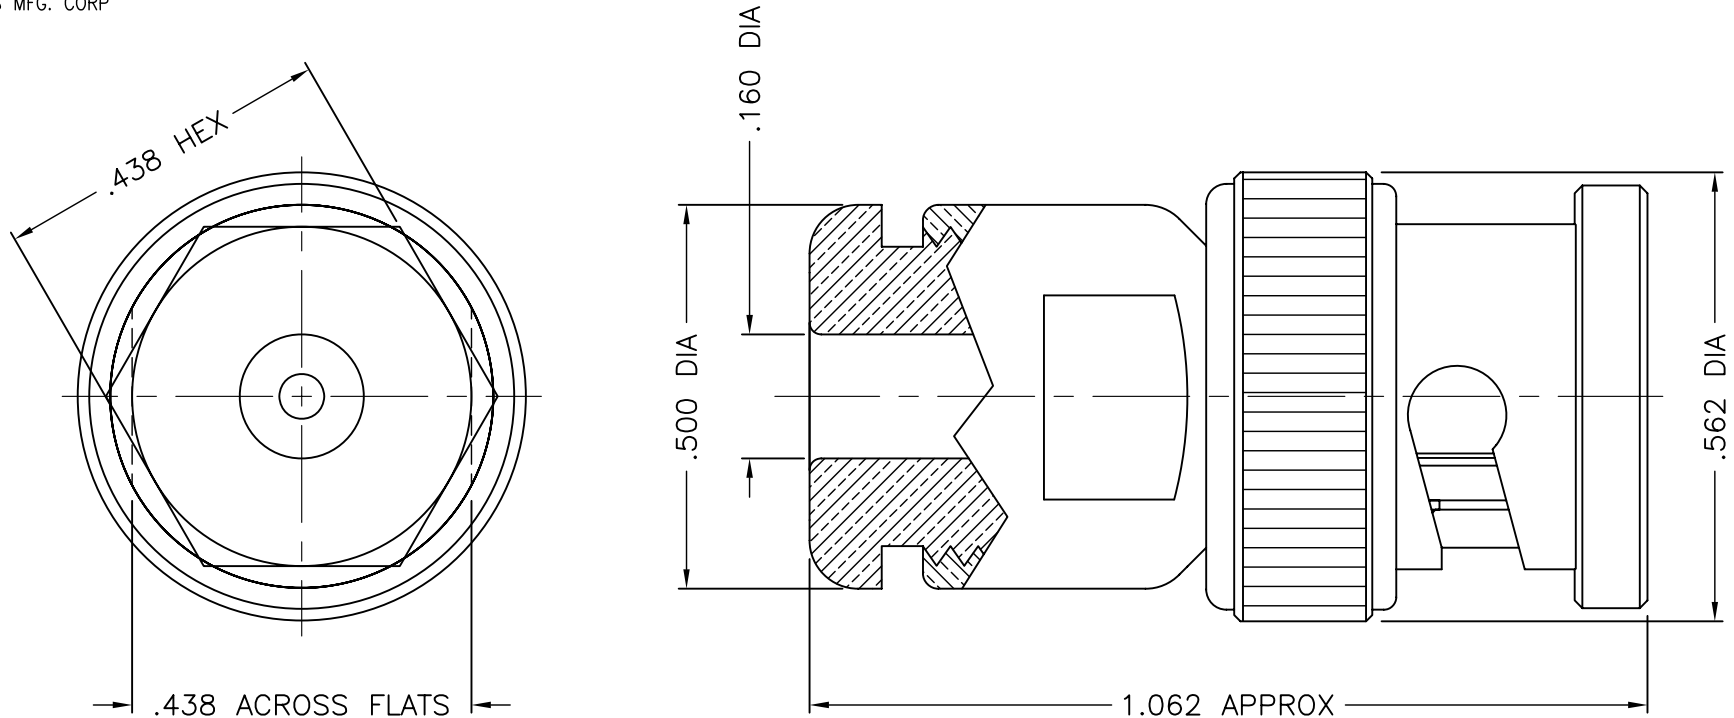

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: INSULATOR - TEFLON PER ASTM D1710
GASKET - SILICONE RUBBER PER ZZ-R-765
SPRING WASHERS - BERYLLIUM COPPER PER ASTM B196
ALL OTHER METAL PARTS - BRASS PER ASTM B16
3. FINISHES: CONTACT - SILVER PLATE PER QQ-S-365
ALL PLATED PARTS - NICKEL PLATE PER QQ-N-290
4. ELECTRICAL PERFORMANCE:
NORMAL IMPEDANCE: 50Ω
FREQUENCY RANGE: DC-4 GHz
VOLTAGE RATING: 500 VOLTS RMS MAX.
INSULATION RESISTANCE: 5000 MEGAOHMS MIN.
DIELECTRIC WITHSTANDING VOLTS: 1500 VOLTS RMS MIN.

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ±.005, 2 PLACES = ±.02, ANGLES = ±1/2°

-	OUTLINE	2/26/08
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: 'BNC' (M) CLAMP PLUG W/CAPTIVE CONTACT FOR RG-180/A, 195B/U CABLES				
Drawn by BJM 2/26/08	Scale 4/1	Ckd. by MR	Engr Appd MCD	FILE NAME: 1001043N001-000T

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

CODE IDENT.-00795

1001-043-N001