
1007-015-N000



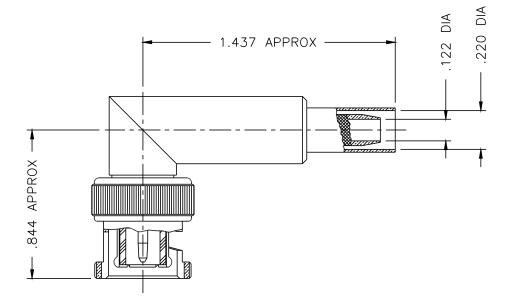

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

2. MATERIAL: CABLE CONTACT - BRASS PER ASTM B16

90° CONTACT - BERYLLIUM COPPER PER ASTM B196

INSULATOR - TEFLON PER ASTM D1710 GASKET - SILICONE RUBBER PER ZZ-R-765 ALL OTHER METAL PARTS - BRASS PER ASTM B16

3. FINISHES: CONTACT - SILVER PLATE PER QQ-S-365 ALL OTHER METAL PARTS - NICKEL PLATE PER QQ-N-290

4. USE CRIMP TOOL M22520/5-19 CLOSURE B (.213 HEX DIE) UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ±.005, 2 PLACES = ±.02,

	ı	OUTLINE	7/21/99	Ţ	
ANGLES = ±1/2*	ALT.	REVISIONS	DATE	Ľ	

	RG-55,		CABLE -	NON-C	PLUG FOR CAPTIVE CONTACT
_	Drawn by MR	Scale 2/1	Ckd. by	Engr Appd	FILE NAME: 1007015N000-000T

Beverly, MA 01915

DELTA ELECTRONICS MFG. CORP.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

1007-015-N000