




RECOMMENDED CABLE TRIM DIMENSIONS

1203-017-A00E-2

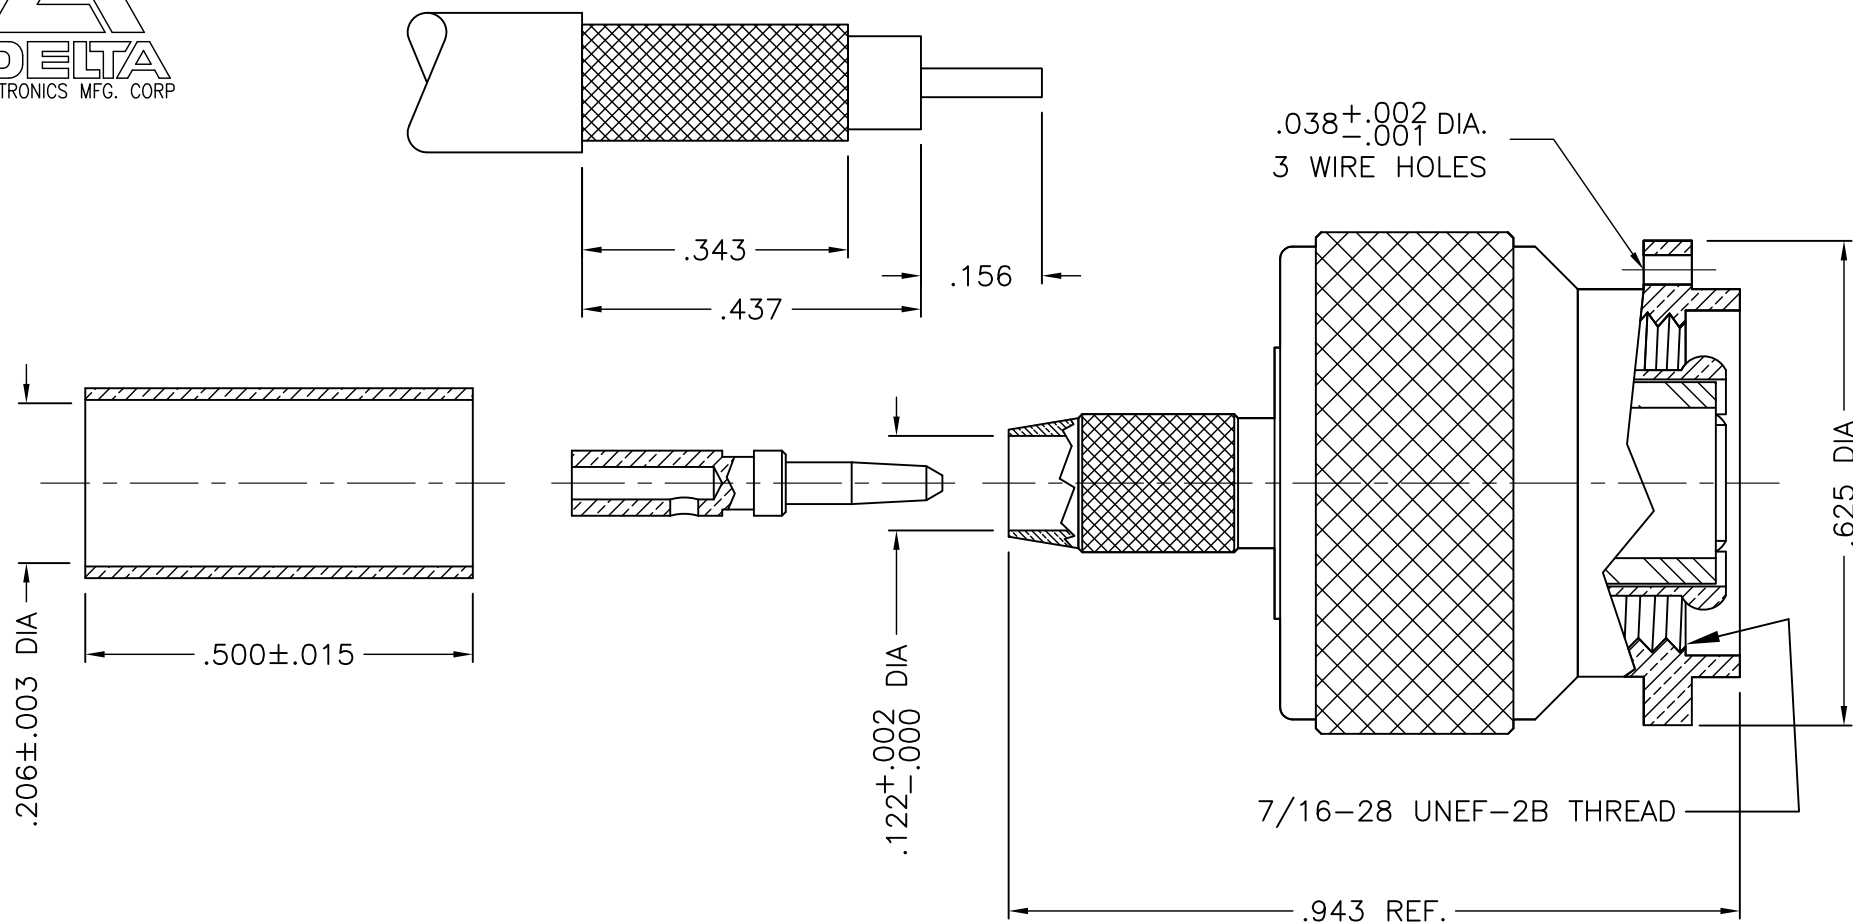

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & CONTACT - BRASS PER ASTM B16
CONTACT FINGERS - BERYLLIUM COPPER PER B196
GASKET - SILICONE RUBBER PER A-A-59588
INSULATOR - TEFLON PER ASTM D1710
CRIMP SLEEVE - D.H.P. COPPER CDA ALLOY 122
3. FINISHES: RETAINING RING - NOT PLATED
CONTACT - GOLD PLATE PER ASTM B488
ALL OTHER METAL PARTS - SILVER PLATE PER QQ-S-365

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$

-	OUTLINE	10/28/09
ALT.	REVISIONS	DATE

M39012/26-0010					
DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915					
TITLE: "TNC" CRIMP PLUG FOR RG-58 & 303/U CABLE - CAPTIVE CONTACT					
Drawn by ADK 10/28/09		Scale 4/1	Ckd. by MR	Engr Appd MCD	FILE NAME: 1203017N00E-001T
CODE IDENT.-00795			1203-017-A00E-2		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.