





1303-036-K000

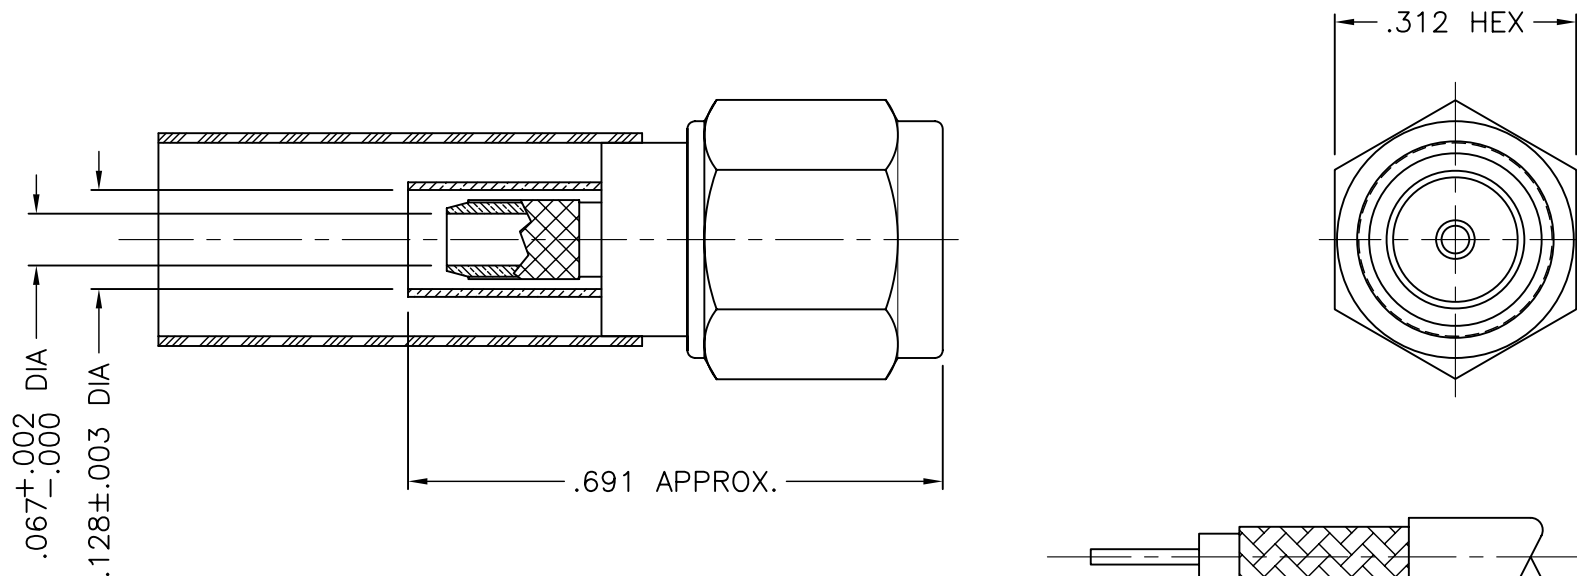

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & HEX COUPLING NUT- CORROSION RESISTANT STEEL PER ASTM A582
CONTACT - BERYLLIUM COPPER PER ASTM B196.
INSULATOR - TEFLON PER ASTM D4894
GASKET - SILICONE RUBBER PER ZZ-R-765
CRIMP SLEEVE - D.H.P. COPPER CDA ALLOY 122
SHRINK SLEEVE - SHRINKABLE POLYOLEFIN PER MIL-I-23053/5
3. FINISHES: BODY & HEX COUPLING NUT - PASSIVATE PER SAE AMS-A2700
CONTACT - GOLD PLATE PER ASTM B488
4. RECOMMENDED CRIMP TOOL: M22520/5-01, DIE SET M22520/5-35, CLOSURE B.

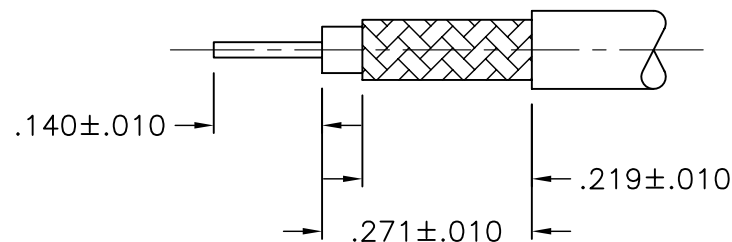

STRIPPING DIMENSIONS

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63	-	OUTLINE	4/15/08
	ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: SMA CRIMP PLUG FOR RG-174 179B, 187A, 188A, 316/U CABLES - CAPTIVE CONTACT				
Drawn by BJM 4/15/08	Scale 4/1	Ckd. by MR	Engr Appd MR	FILE NAME: 1303036K000-000T
CODE IDENT.-00795		1303-036-K000		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.