

1308-094-G003-1



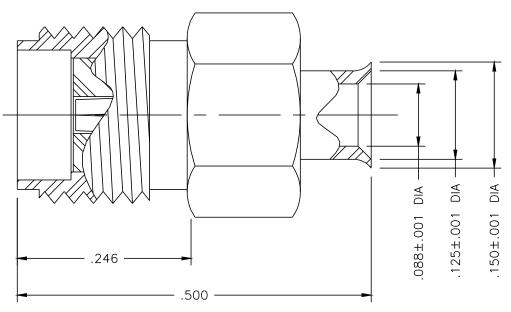

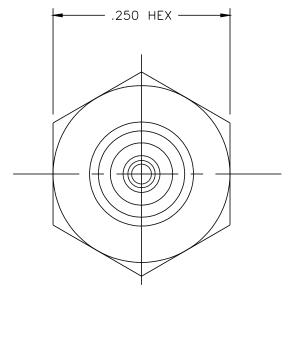

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

2. MATERIAL: BODY — CORROSION RESISTANT STEEL PER ASTM A582 CONTACT — BERYLLIUM COPPER PER ASTM B196.

INSULATOR - TEFLON PER ASTM D1710

3. FINISHES: BODY & CONTACT - GOLD PER MIL-G-45204.

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$,

	-	OUTLINE	10-23-96	D
NGLES = ±1/2°	ALT.	REVISIONS	DATE	
AND SHALL NOT BE	REPRODI	ICED OR COP	IFD	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

	DELTA	ELECTRONI	CS MFG. (CORP. Bev	verly, MA 01915			
	TITLE: 'SMA' ONE STEP CABLE JACK							
	FOR .085 DIA SEMI-RIGID CABLE							
96	Drawn by nct 10-23-96	Scale 8/1	Ckd. by	Engr Appd	FILE NAME: 1308094G003-001T			