




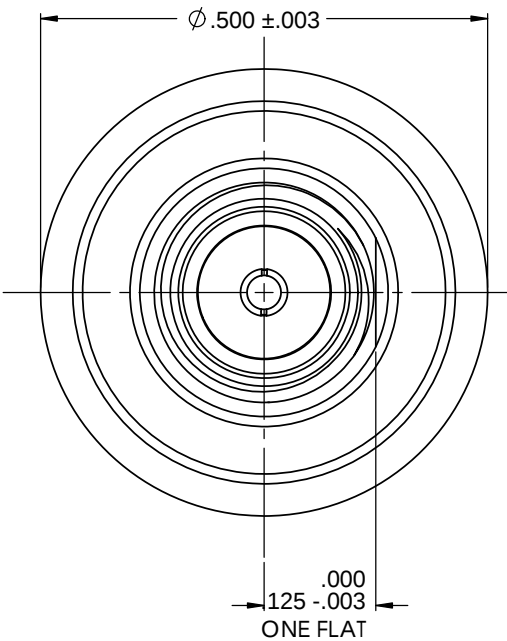

VIEW SHOWN WITH HEX NUT
AND LOCKWASHER REMOVED

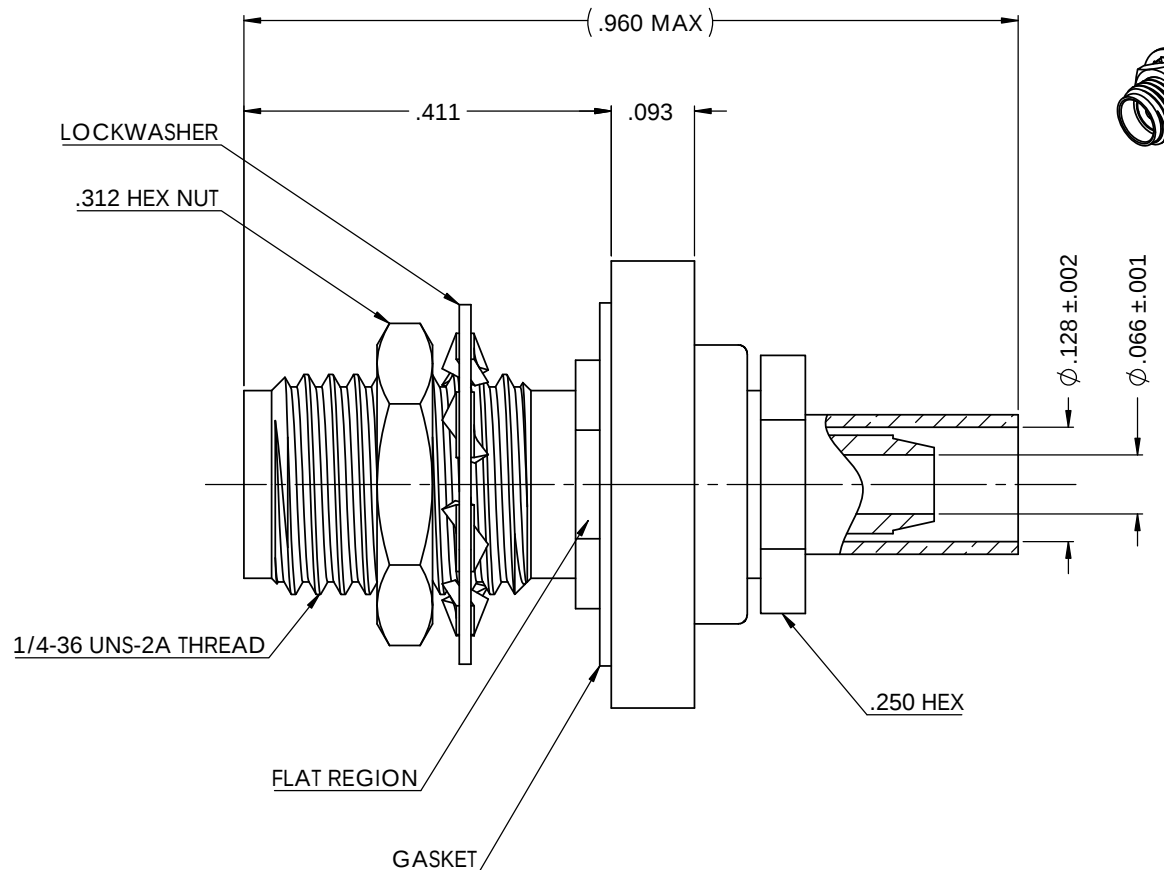

1316037K66E-000



NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

M39012/59-3007

LOCKWASHER	SPRING STEEL	PASSIVATE PER SAE-AMS-2700
HEX NUT	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
GASKET	SILICONE RUBBER PER A-A-59588	N/A
SLEEVE	TELLURIUM COPPER PER ASTM B124, C14500, TEMPER H02	GOLD PLATE PER ASTM B488
CLAMP NUT	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
CLAMP	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	GOLD PLATE PER ASTM B488
INSULATOR	TEFLON PER ASTM D1710, TYPE 1, GRADE 1, CLASS A.	N/A
CONTACT	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488
INSULATOR	TEFLON PER ASTM D1710, TYPE 1, GRADE 1, CLASS A.	N/A
BODY	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
DESCRIPTION	MATERIAL	FINISH

Table 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
DELTA ELECTRONICS MFG CORP. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
DELTA ELECTRONICS MFG CORP. IS
PROHIBITED.

FILE NAME: 1316037K66E-000T

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ± 1/64
ANGULAR: MACH ± 1° BEND ± 1°
TWO PLACE DECIMAL ± .01
THREE PLACE DECIMAL ± .005
SURFACE FINISH = 63
MAX. CORNER BREAKS = .004

THIRD ANGLE
PROJECTION

MATERIAL
SEE TABLE

FINISH
SEE TABLE

SCALE: 7:1

NAME	DATE
DRAWN SRC	3/9/2017
CHECKED BJM	3/9/2017
ENG APPR. BJM	3/9/2017

COMMENTS:

DELTA ELECTRONICS MFG CORP.
BEVERLY, MA 01915
www.deltamfg.com / Ph: 978-927-1060 / Fax: 978-922-6430

TITLE:
**SMA
SOLDER SLEEVE JACK FOR
RG-174, 187, 188 & 316/U CABLE**

SIZE	DWG. NO.	REV
B	1316037K66E-000	-

CODE ID - 00795 WEIGHT: 4.61 g SHEET 1 OF 1