


.088 TYP -- $.053^{+.004}_{-.001}$ TYP \rightarrow 1/4-36 UNS-2A TH'D-**-** .065 .230 MAX PANEL --.187 TYP **BODY** AND CONTACT

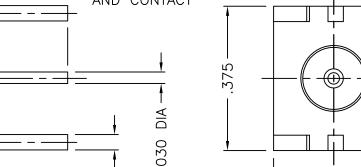

.040 TYP -

- .312 -

NOTES:

LOCKWASHER

HEX NUT-

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

2. MATERIAL: BODY - BRASS PER ASTM B16

CONTACT - BERYLLIUM COPPER PER ASTM B196

380

.500

INSULATOR - TEFLON PER ASTM D1710

3. FINISHES: BODY & CONTACT - GOLD PLATE PER MIL-G-45204 OUTLINE 8/8/13 UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ±.005, 2 PLACES = ±.02, ANGLES = ±1/2, SURFACE FINISH = 63 DATE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

DELTA ELE	CTRONICS	MFG.	CORP.	Beverly.	MA	01915
-----------	----------	------	-------	----------	----	-------

TITLE: SMA END-LAUNCH BULKHEAD JACK RECEPTACLE -POST CONTACT - FOR .047 TH'K BOARD

Drawn by

CODE IDENT.-00795 1367000G91P-022