




DIMENSIONS IN BRACKETS ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY.

1368-000-G91P-6

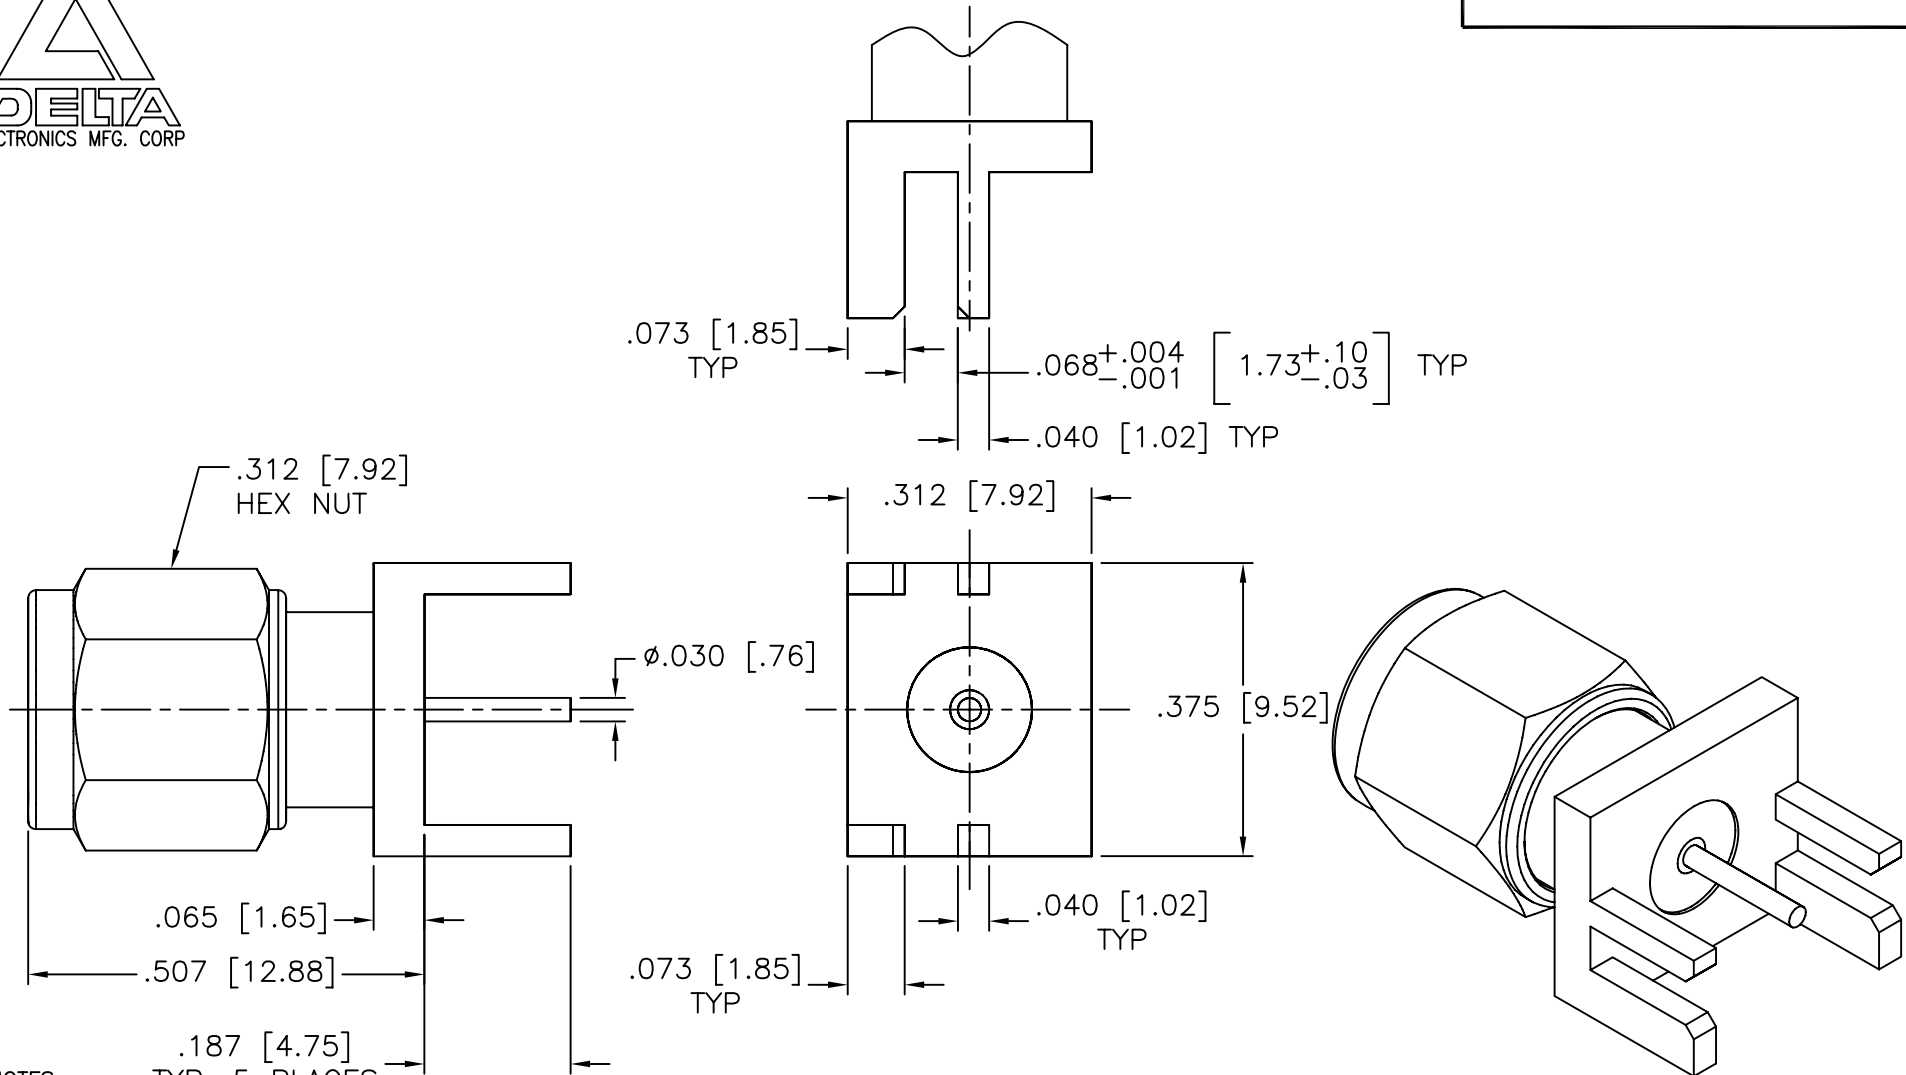

**NOTES:**

TYP, 5 PLACES

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & COUPLING NUT- BRASS PER ASTM B16  
INSULATOR - TEFLON PER ASTM D1710  
CONTACT & LOCKING RING - BERYLLIUM COPPER PER ASTM B196.  
GASKET - SILICONE RUBBER PER ZZ-R-765
3. FINISHES: ALL METAL PARTS - GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES =  $\pm.005$ , 2 PLACES =  $\pm.02$ , ANGLES =  $\pm 1/2^\circ$ , SURFACE FINISH = 63

-	OUTLINE	8/29/08
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915					
TITLE: SMA END LAUNCH P.C.B. PLUG RECEPTACLE - FOR .062 TH'K BOARD					
Drawn by BJM 8/29/08	Scale 4/1	Ckd. by MR	Engr Appd MR	FILE NAME: 1368000G91P-006T	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

CODE IDENT.-00795

1368-000-G91P-6