




DIMENSIONS IN BRACKETS ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY.

1397-000-K051-013

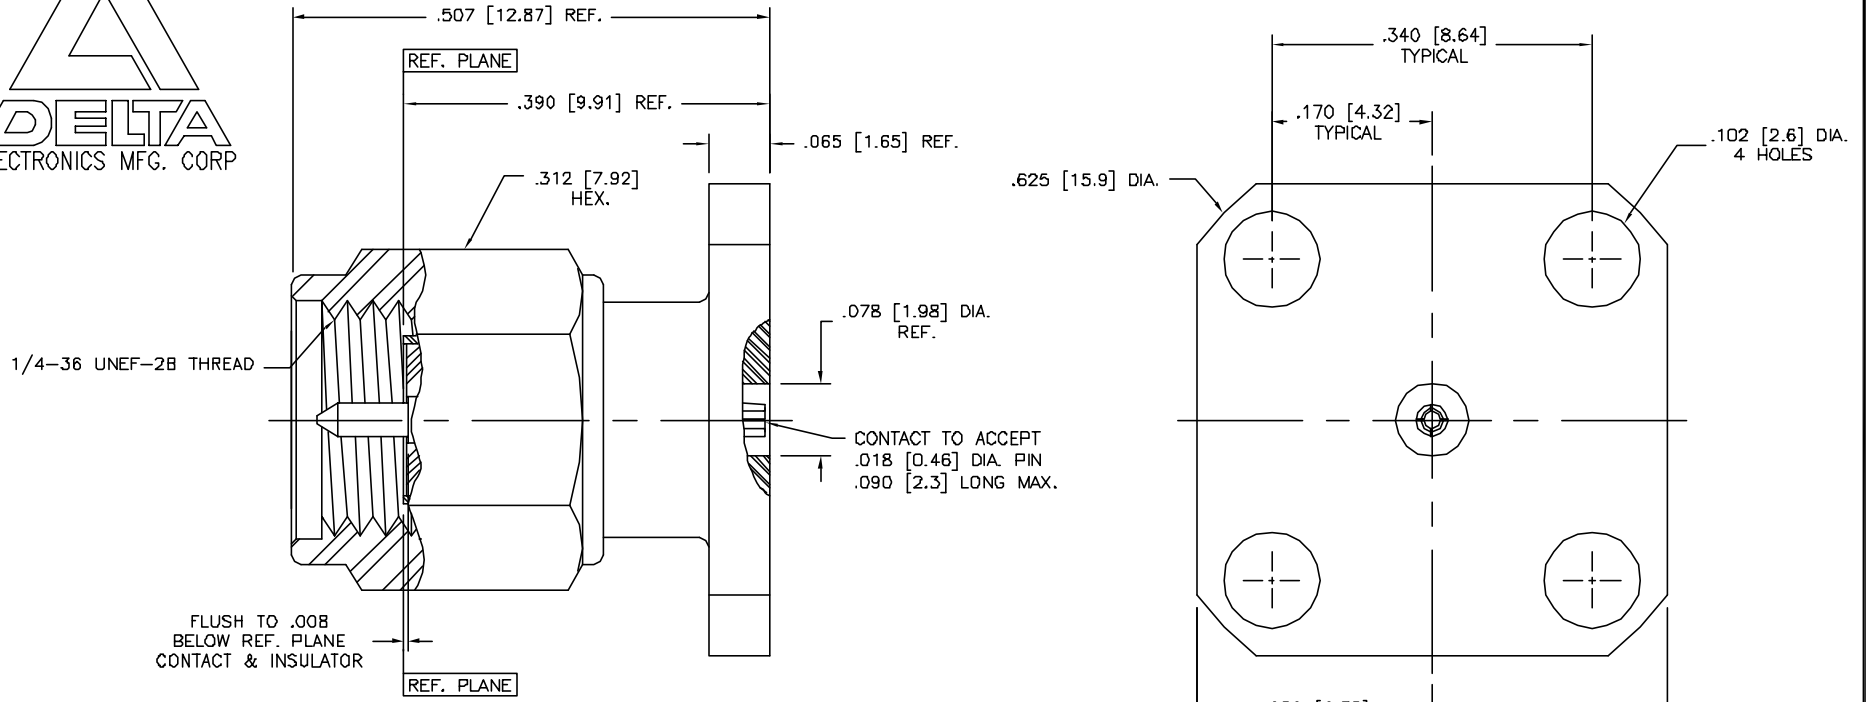

NOTES:

- ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348, EXCEPT WHERE NOTED.
- MATERIAL: BODY & COUPLING NUT - CORROSION RESISTANT STEEL, SERIES 303, PER ASTM A582
 CONTACT - BERYLLIUM COPPER PER ASTM B196.
 LOCKING RING - BERYLLIUM COPPER PER ASTM B196
 INSULATOR - TEFLON PER ASTM D1710
 GASKET - SILICONE RUBBER PER A-A-59588
- FINISHES: BODY & COUPLING NUT - PASSIVATE PER AMS-QQ-P-35
 CONTACT - GOLD PLATE PER MIL-G-45204

- 4. ELECTRICAL DATA:**
- FREQUENCY: DC TO 26.5 GHz
 - VSUR: DC TO 18.0 GHz - 1.15:1 MAXIMUM
 18.0 TO 26.5 GHz - 1.25:1 MAXIMUM
 - INSERTION LOSS: $.03 \sqrt{f(\text{GHz})}$ dB MAXIMUM
 - INSULATION RESISTANCE: 5,000 MEGOHMS MINIMUM
 - VOLTAGE RATING: 1,000 Vrms MINIMUM AT SEA LEVEL,
 250 Vrms MINIMUM AT 70,000 FEET
 - DIELECTRIC WITHSTANDING VOLTAGE: 1,000 Vrms MINIMUM
 - RF LEAKAGE: -100 dB MIN.

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: 'SMA' PANEL MOUNT PLUG RECEPTACLE, 4 HOLE FLANGE FIELD REPLACEABLE, AIRSECTION - ACCEPTS .018 D. PIN				
MATERIAL: SEE NOTE 2				
FINISH: SEE NOTE 3				
BUM STM 03/17/05	Scale 8/1	Dwg. by	Mfg. Appd.	Engr. Appd.
CODE IDENT.-00795		1397-000-K051-013		

UNLESS OTHERWISE SPECIFIED; TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = $\#3$

-	OUTLINE	11/16/06							
ALT.	REVISIONS	DATE	-	REL	ERN	x			
ALT.	REVISIONS	DATE					ENGR APPD	MFG APPD	

FILE NAME: 1397000K051-013T PLT # 8/1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.