




DIMENSIONS IN BRACKETS ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY.

1397-000-K911-066

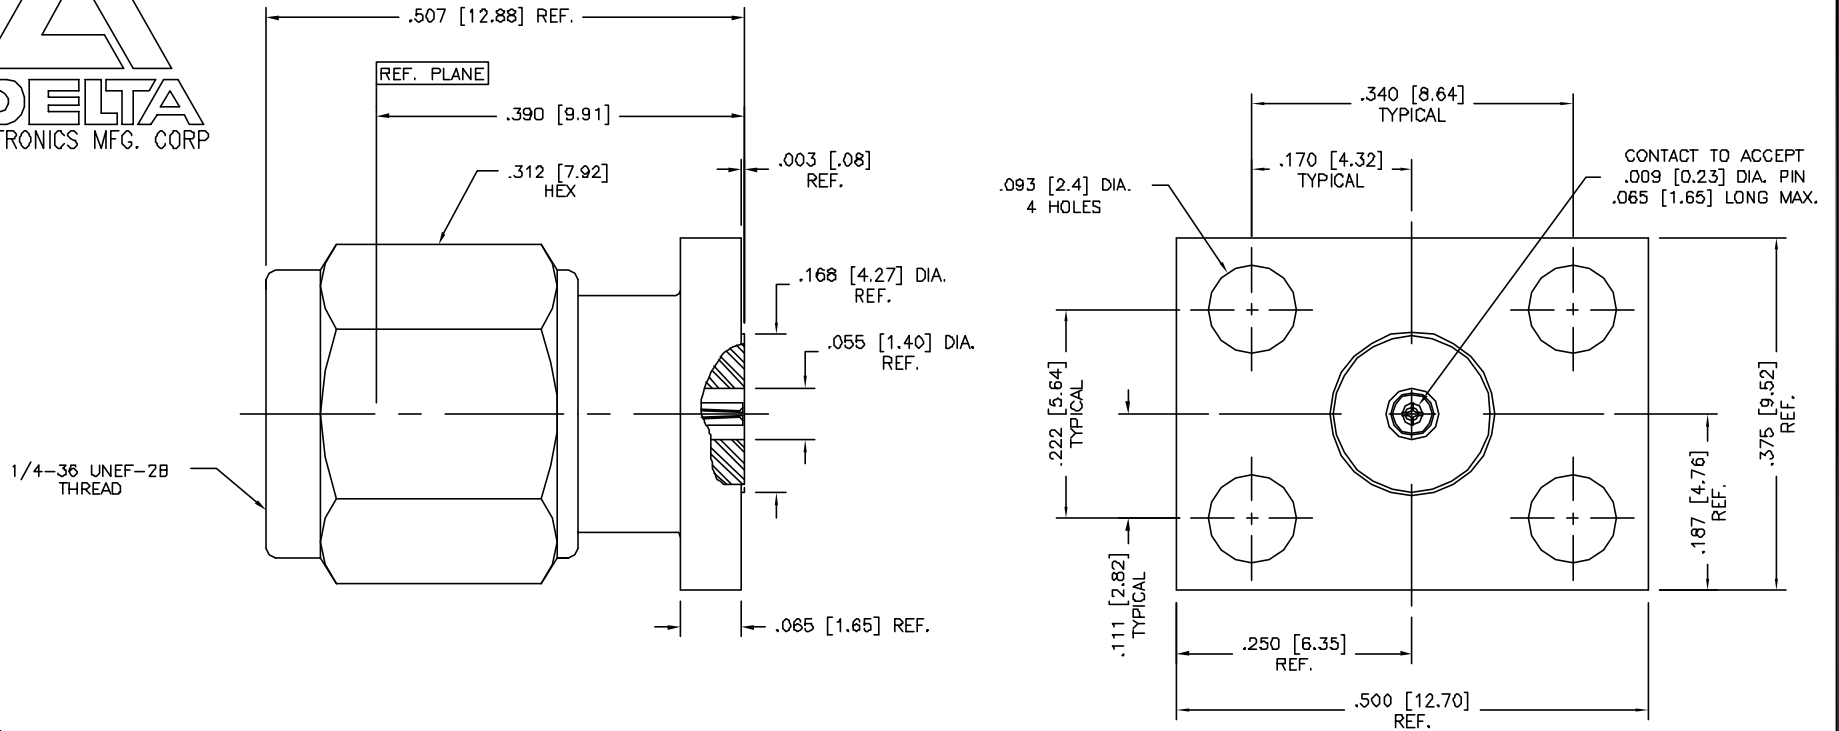

**NOTES:**

- CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-34B.
- MATERIAL: BODY, COUPLING NUT & BUSHING - CORROSION RESISTANT STEEL, PER ASTM A582, TYPE 303  
CONTACT - BERYLLIUM COPPER, ALLOY C1730D PER ASTM B196.  
LOCKING RING - BERYLLIUM COPPER, PER ASTM B196  
GASKET - SILICONE RUBBER, PER A-A-59588  
INSULATORS - TEFLON (PTFE), PER ASTM D1710  
- ULTEM 1000 (PEI), PER ASTM D5205
- FINISHES: BODY, COUPLING NUT & BUSHING - PASSIVATE PER AMS-QQ-P-35  
CONTACT - GOLD PLATE PER MIL-G-45204

**4. ELECTRICAL DATA:**

FREQUENCY: DC TO 27.0 GHz  
VSWR: DC TO 18.0 GHz - 1.10:1 MAX.  
18.0 TO 27.0 GHz - 1.15:1 MAX.  
INSERTION LOSS: .03√f(GHz) dB MAXIMUM  
INSULATION RESISTANCE: 5,000 MEGOHMS MINIMUM  
VOLTAGE RATING: 1,000 Vrms MINIMUM AT SEA LEVEL,  
250 Vrms MINIMUM AT 70,000 FEET  
DIELECTRIC WITHSTANDING VOLTAGE: 1,000 Vrms MINIMUM  
RF LEAKAGE: -100 dB MIN.

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: 'SMA' PANEL MOUNT PLUG RECEPTACLE, 4 HOLE FLANGE, FIELD REPLACEABLE - ACCEPTS .009 DIA. PIN				
MATERIAL: SEE NOTE 2				
FINISH: SEE NOTE 3				
Rev'd	Scale	Dwg. by	Mfg. Appd.	Engr. Appd.
3/11/05	8/1			
CODE IDENT.-00795		1397-000-K911-066		

UNLESS OTHERWISE SPECIFIED; TOLERANCES: 3 PLACES = ±.005, 2 PLACES = ±.02, ANGLES = ±1/2°. SURFACE FINISH = 63

-	OUTLINE	11/16/06
ALT.	REVISIONS	DATE

-	REL	ERN	x				
ALT.	REVISIONS	DATE	ENR APPD	MFG APPD			

FILE NAME: 1397000K911-066T PLT 8/1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.