




1601-079-N001

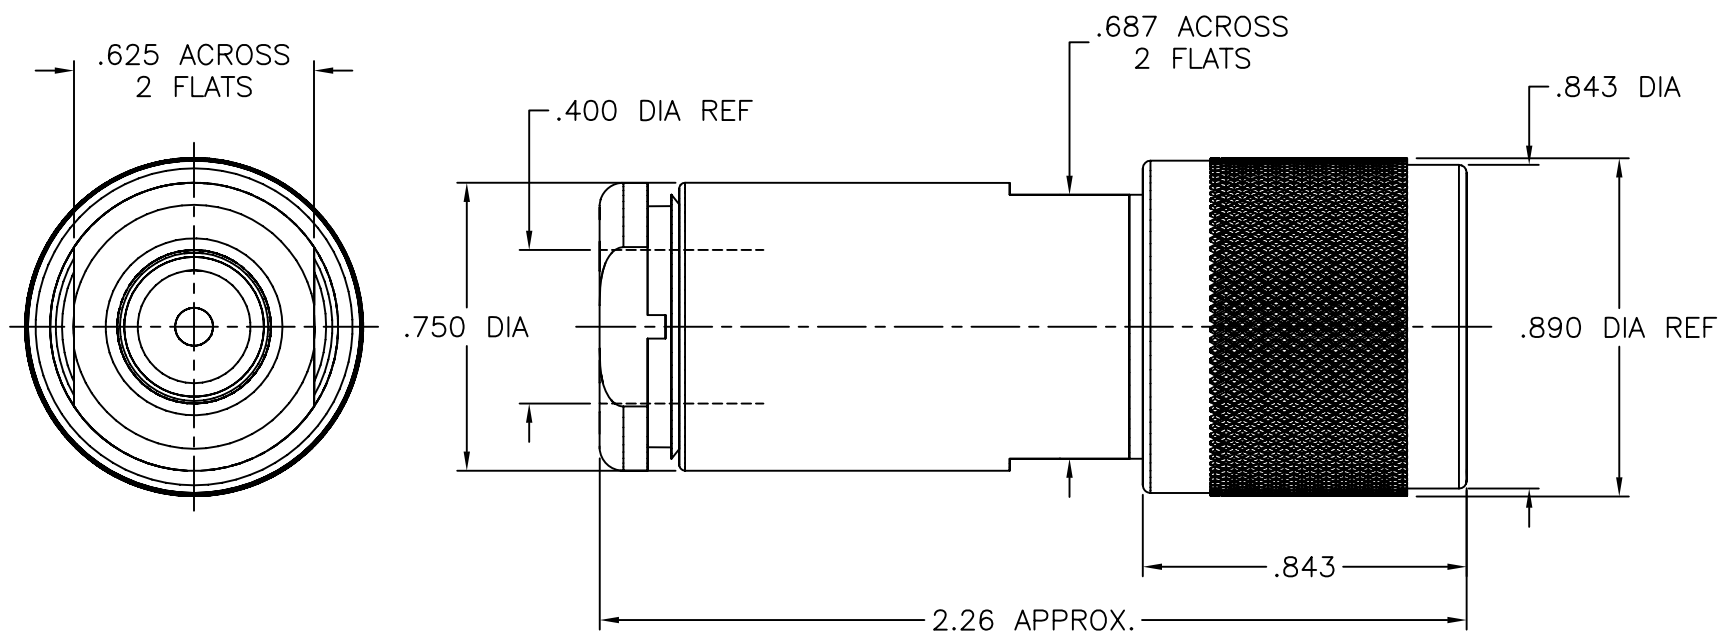

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: INSULATOR - TEFLON PER ASTM D4894
GASKETS - SILICONE RUBBER PER A-A-59588
LOCKING RING - PHOSPHOR BRONZE PER ASTM B139
ALL OTHER METAL PARTS - BRASS PER ASTM B16
3. FINISHES: CONTACT - SILVER PLATE PER ASTM B700
ALL OTHER METAL PARTS - NICKEL PLATE PER SAE-AMS-QQ-N-290

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ± 0.005 , 2 PLACES = ± 0.02 , ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63

A	REDRAWN	5/15/08
-	OUTLINE	4/15/96
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: 'HN' PLUG FOR RG 393/U CABLE				
Drawn by BJM 4/15/08	Scale 2/1	Ckd. by MR	Engr Appd MR	FILE NAME: 1601079N001-000T

CODE IDENT.-00795

1601-079-N001

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.