


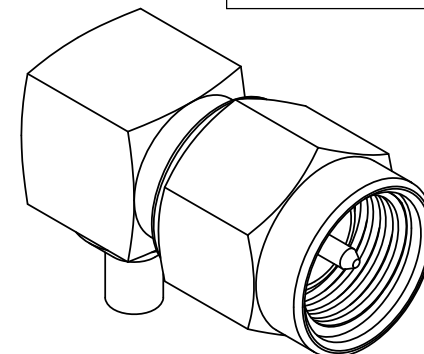


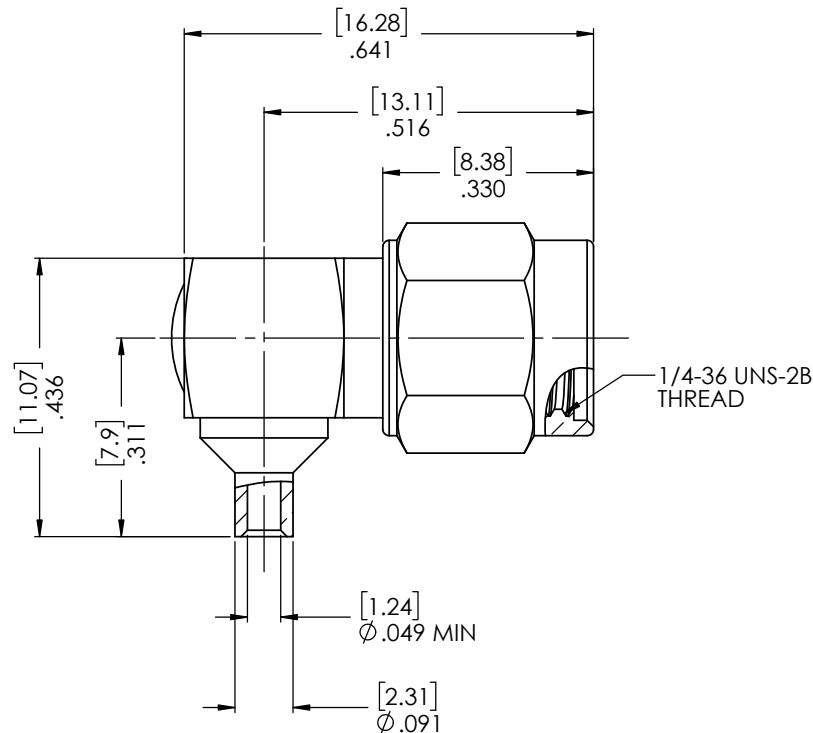

ALL DIMENSIONS IN BRACKETS ARE IN MM AND ARE FOR REFERENCE PURPOSE ONLY

1305111G003-000

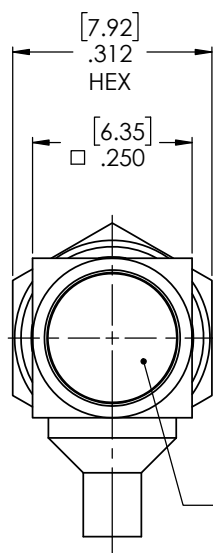

RECOMMENDED CABLE TRIM
DIMENSIONS

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

GASKET	SILICONE RUBBER PER A-A-59588	N/A
LOCKING RING	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	N/A
CAP	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
COUPLING NUT	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
INSULATOR	TEFLON PER ASTM D1710, TYPE 1, GRADE 1, CLASS A.	N/A
CONTACT	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
BODY	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
DESCRIPTION	MATERIAL	FINISH

Table 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS MFG CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA ELECTRONICS MFG CORP. IS PROHIBITED.
FILE NAME: 1305111G003-0001

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/64$
ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$
TWO PLACE DECIMAL $\pm .01$
THREE PLACE DECIMAL $\pm .005$
SURFACE FINISH = 63
MAX. CORNER BREAKS = .004
THIRD ANGLE PROJECTION
MATERIAL SEE TABLE
FINISH SEE TABLE
SCALE: 5:1

DRAWN ADK 7/19/2018
CHECKED BJM 7/19/2018
ENG APPR. BJM 7/19/2018
COMMENTS:

NAME DATE
DELTA ELECTRONICS MFG CORP.
BEVERLY, MA 01915
www.deltarfi.com / Ph: 978-927-1060 / Fax: 978-922-6430
TITLE:
SMA RIGHT ANGLE
DIRECT SOLDER PLUG
.047 S.R.
SIZE DWG. NO. REV
B 1305111G003-000 -
CODE ID - 00795 WEIGHT: 4.76 g SHEET 1 OF 1