




3701-025-G003-2

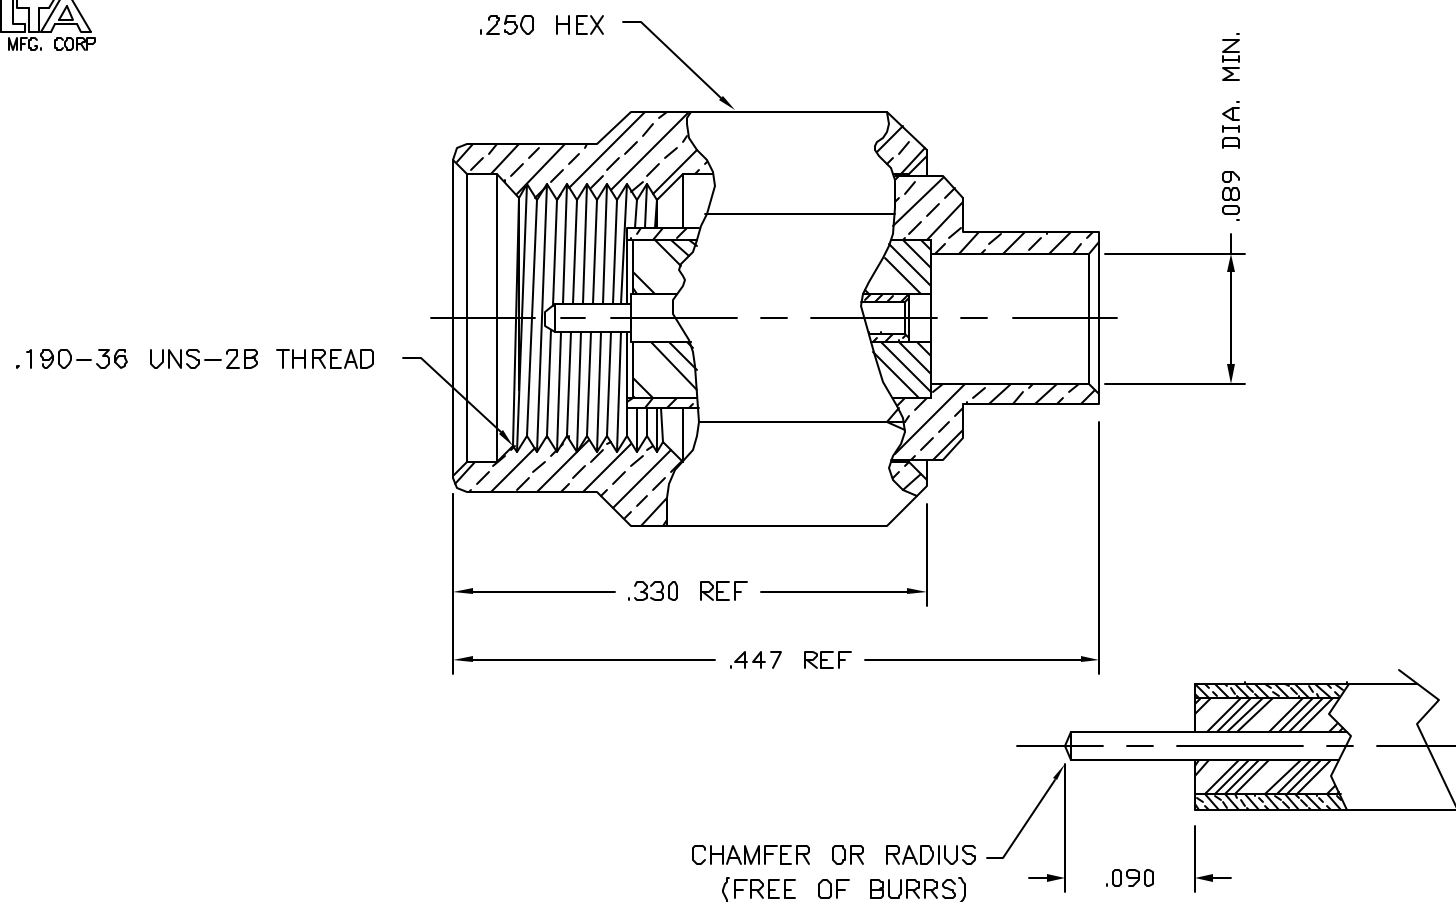

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & COUPLING NUT - BRASS PER ASTM B16.
CONTACT - BERYLLIUM COPPER PER ASTM B196.
GASKET - SILICONE RUBBER PER A-A-59588
INSULATOR - TEFLON PER ASTM D1710
3. FINISHES: COUPLING NUT - GOLD PLATE PER MIL-G-45204
BODY & CONTACT - GOLD PLATE PER MIL-G-45204

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: SSMA DIRECT SOLDER PLUG FOR .086 SEMI-RIGID CABLE				
Drawn by MR	Scale 4/1	Ckd. by BJM	Engr Appd MR	FILE NAME: 3701025G003-002T

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .003$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$

ALT.	REVISIONS	DATE
-	OUTLINE	1/4/06

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

CODE IDENT.-00795

3701-025-G003-2