
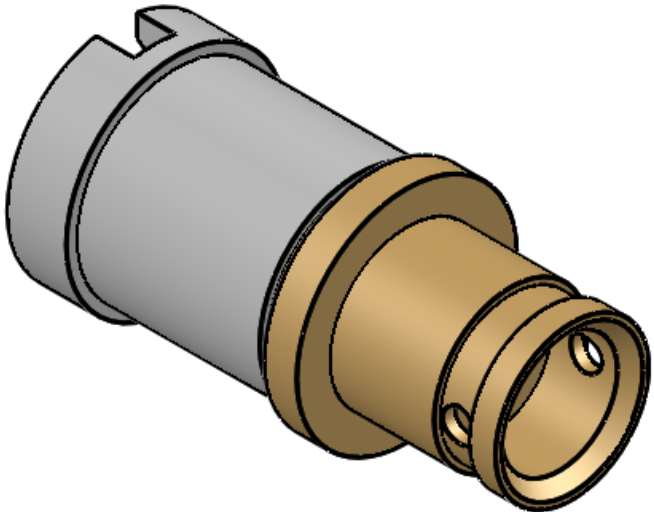
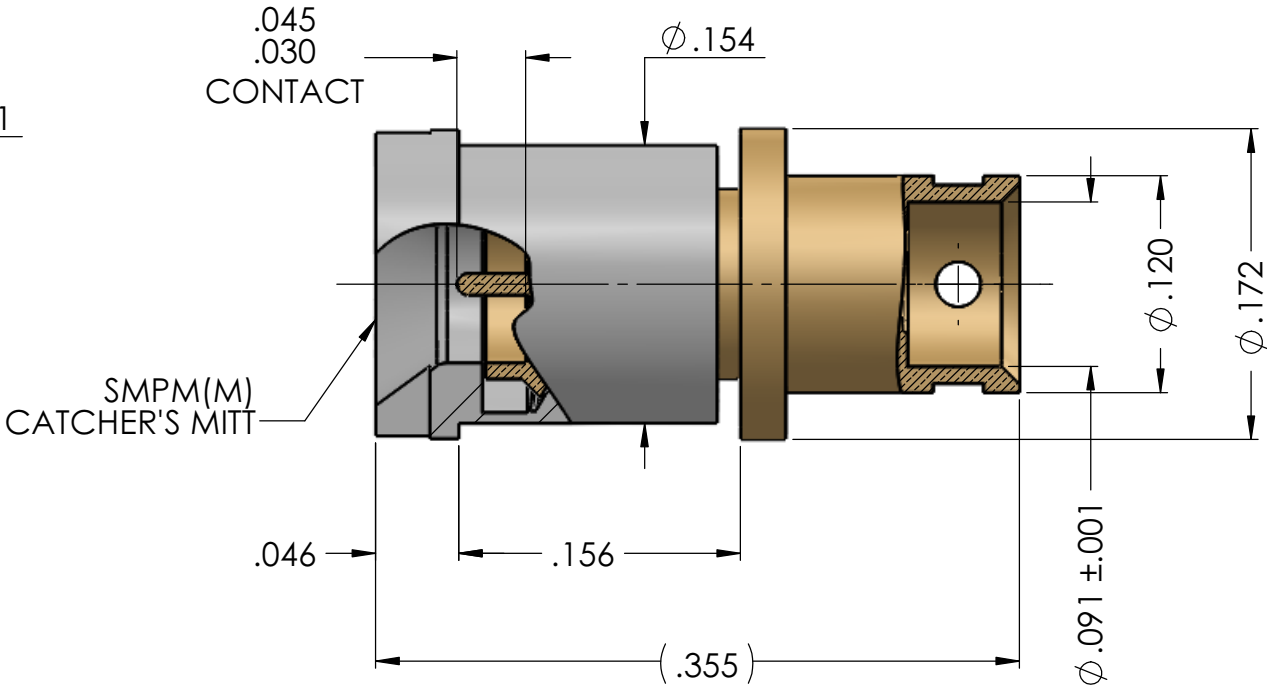


8801094G003-001

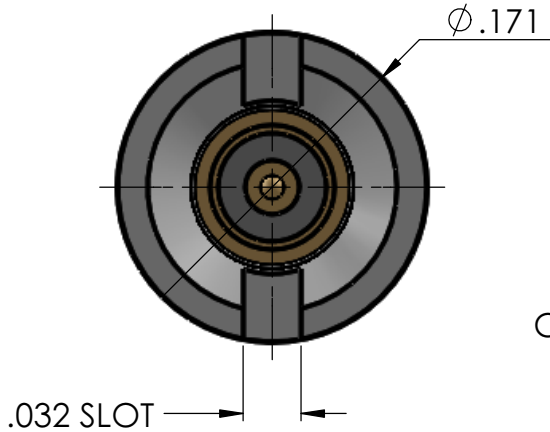

MECHANICAL SPECIFICATIONS	
DURABILITY	500 CYCLES
FORCE TO ENGAGE	2 LBS TYP
FORCE TO DISENGAGE	1.5 LBS TYP

ELECTRICAL SPECIFICATIONS	
FREQUENCY RANGE	DC - 40 GHz
VSWR	1.35 MAX DC-26.5 GHz 1.50 MAX DC - 40 GHz
IMPEDANCE	50 ± 2 OHMS
DWV @ SEA LEVEL	500 Vrms
INSULATION RESIST.	5,000 MΩ

NOTES:


1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

INSULATOR	TEFLON PER ASTM D1710, TYPE 1, GRADE 1, CLASS A.	N/A
LOCKING NUT	CORROSION RESISTANT STEEL PER ASTM 582, S30300 ALLOY, COND. A	PASSIVATE PER SAE-AMS-2700
CONTACT	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488, TYPE 2, CLASS 1.27
BODY	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488, TYPE 2, CLASS .25
DESCRIPTION	MATERIAL	FINISH


Table 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS MFG CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA ELECTRONICS MFG CORP. IS PROHIBITED.

FILE NAME: 8801094G003-001T

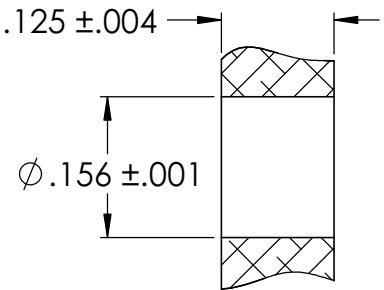

RECOMMENDED MOUNTING HOLE

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	DELTA ELECTRONICS MFG CORP. BEVERLY, MA 01915 www.deltarf.com / Ph: 978-927-1060 / Fax: 978-922-6430		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/64 ANGULAR: MACH ± 1° BEND ± 1° TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005 SURFACE FINISH = 63 MAX. CORNER BREAKS = .004		DRAWN	ADK	12/29/2015	TITLE: SMPM STRAIGHT BULKHEAD MOUNT DIRECT SOLDER MALE - CATCHER'S MITT FOR .085 S.R. CABLE	
		CHECKED	ADK	12/29/2015		
		ENG APPR.	BJM	12/29/2015		
		COMMENTS:				
THIRD ANGLE PROJECTION					SIZE B DWG. NO. 8801094G003-001 REV -	
MATERIAL	SEE TABLE					
FINISH	SEE TABLE					
SCALE:					CODE ID - 00795	
					WEIGHT: 0.49 g	SHEET 1 OF 1