
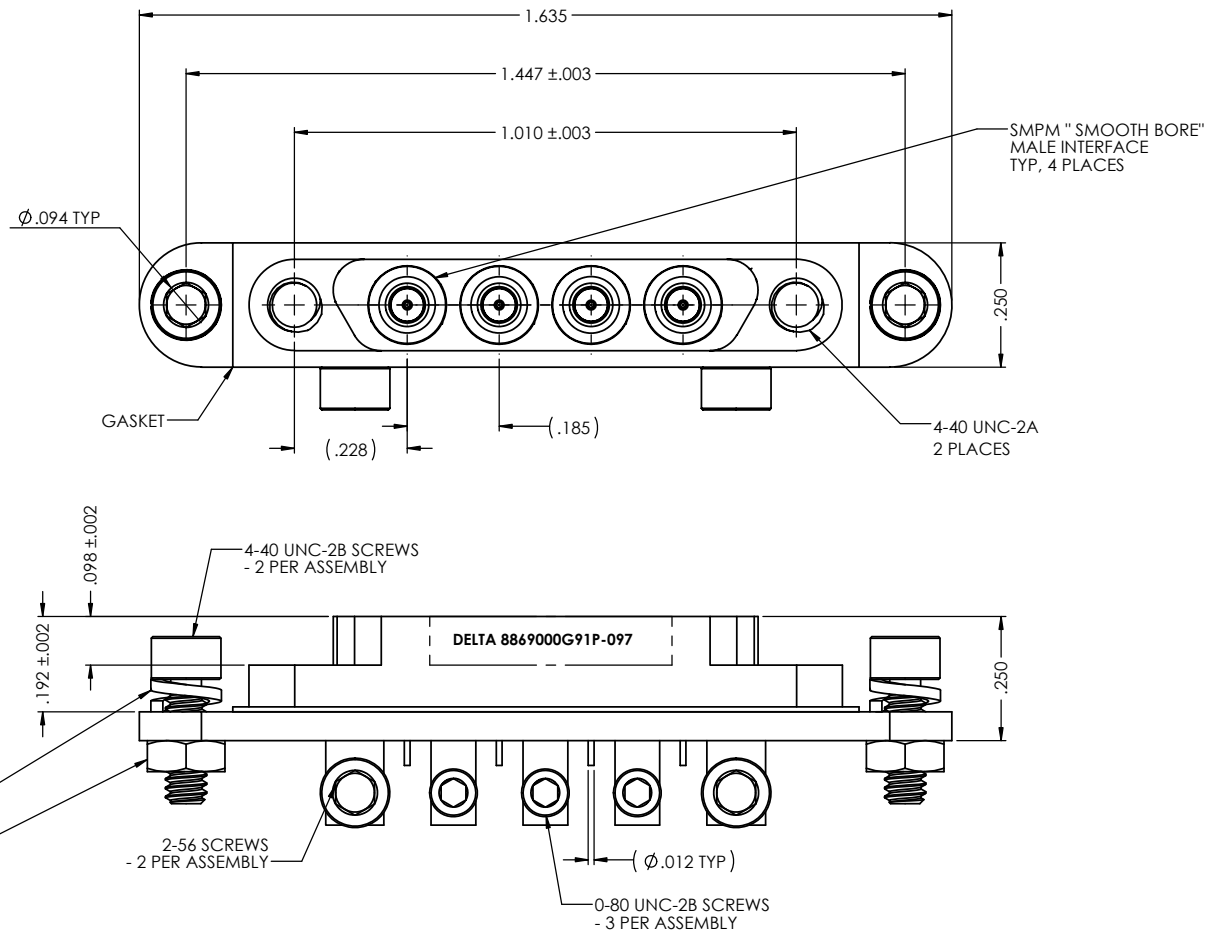


ROHS COMPLIANT

8869000G91P-097

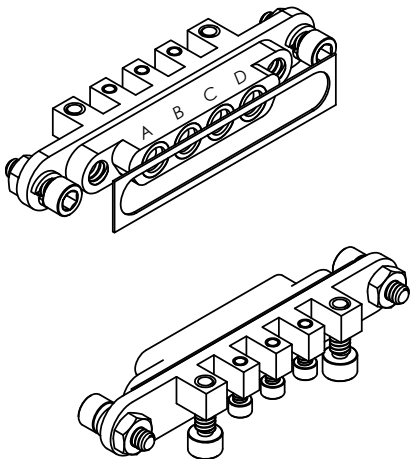

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. ALL MOUNTING SCREWS SHIPPED LOOSE.

SPLIT LOCK	316L STAINLESS STEEL	N/A
HEX NUT	18-8 STAINLESS STEEL	N/A
SCREW	18-8 STAINLESS STEEL	N/A
SCREW	18-8 STAINLESS STEEL	PASSIVATE PER SAE-AMS-2700
CONTACT	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488
BLOCK	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
GASKET	SILICONE RUBBER PER A-A-59588	N/A
INSULATOR	TORLON 4203 (POLYAMIDE-IMIDE) PER MIL-P-46179	N/A
BUSHING	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
DESCRIPTION	MATERIAL	FINISH

Table 1

DIMENSIONS ARE IN INCHES				DELTA ELECTRONICS MFG CORP.					
TOLERANCES:				BEVERLY, MA 01915					
FRACTIONAL: ±1/64				DRAWN	TS	2/22/2019	www.deltarf.com / Ph: 978-927-1060 / Fax: 978-922-6430		
ANGULAR: MACH3 ±1° BEND ±1°				CHECKED	ADK	2/22/2019			
TWO PLACE DECIMAL: ±.01				ENG APPR.	BJM	2/22/2019			
THREE PLACE DECIMAL: ±.005				MFG APPR.	MCD	2/22/2019			
MAX CORNER BREAK = .005				Q.A.	MR	2/22/2019			
XXX DENOTES CRITICAL DIMENSION				ENGINEERING DATA:			TITLE: SMPM PCB MOUNT RECEPTACLE MALE - SMOOTH BORE 4 POSITION		
MATERIAL				SEE TABLE 1					
FINISH				SEE TABLE 1					
FILE NAME: 8869000G91P-097				WEIGHT (g): 9.93					
PROPRIETARY AND CONFIDENTIAL				THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS MFG. CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA ELECTRONICS MFG. CORP. IS PROHIBITED.			SIZE A	DWG. 8869000G91P-097	REV. -