
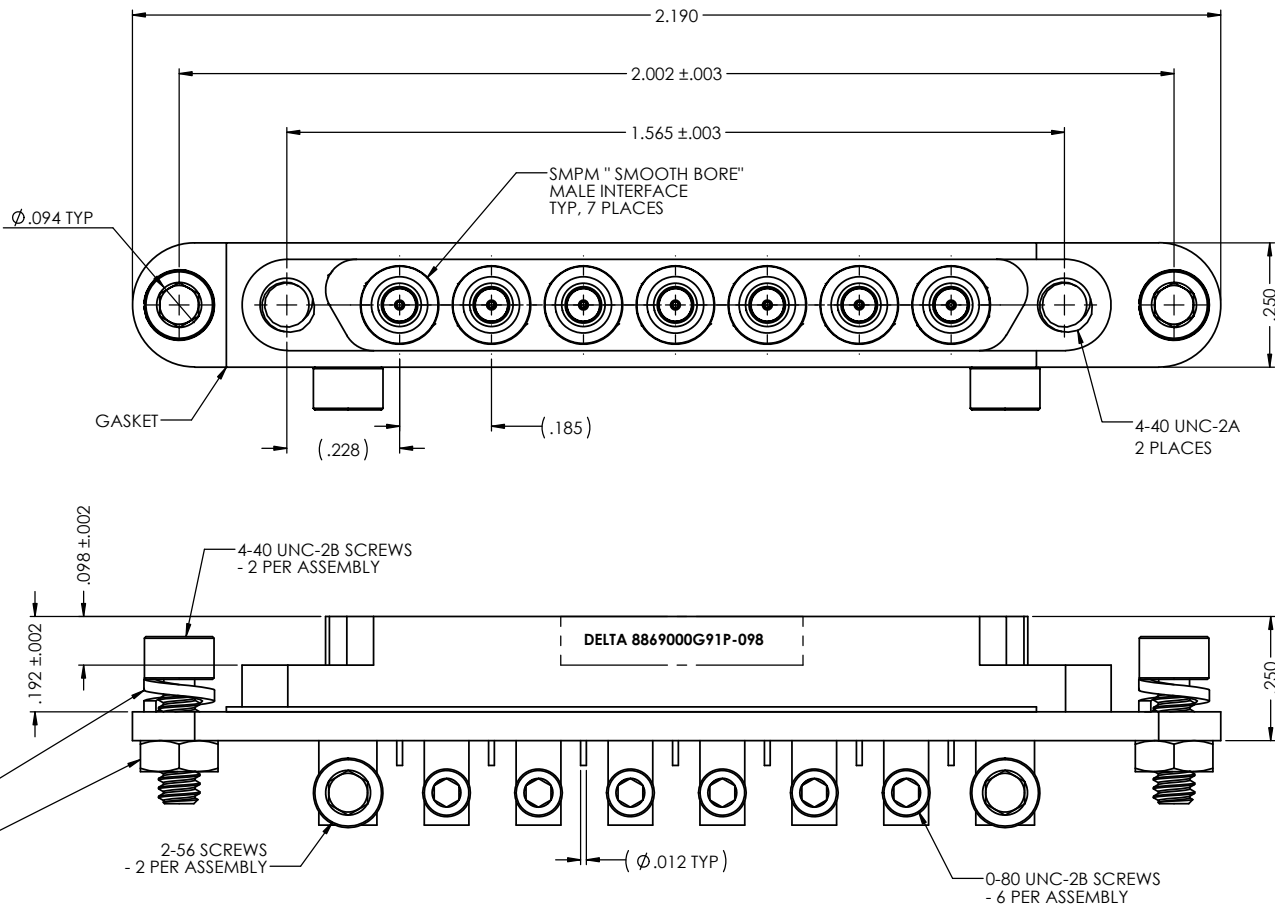


ROHS COMPLIANT

8869000G91P-100

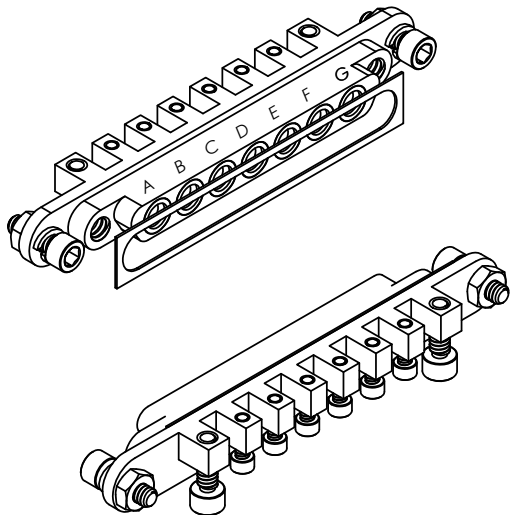

NOTES:

- 1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
- 2. ALL MOUNTING SCREWS SHIPPED LOOSE.

SPLIT LOCK	316L STAINLESS STEEL	N/A
HEX NUT	18-8 STAINLESS STEEL	N/A
SCREW	18-8 STAINLESS STEEL	N/A
SCREW	18-8 STAINLESS STEEL	PASSIVATE PER SAE-AMS-2700
CONTACT	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488
BLOCK	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
GASKET	SILICONE RUBBER PER A-A-59588	N/A
INSULATOR	TORLON 4203 (POLYAMIDE-IMIDE) PER MIL-P-46179	N/A
BUSHING	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
DESCRIPTION	MATERIAL	FINISH

Table 1

DIMENSIONS ARE IN INCHES				DELTA ELECTRONICS MFG CORP.			
TOLERANCES:				BEVERLY, MA 01915			
FRACTIONAL $\pm 1/64$				www.deltatrf.com / Ph: 978-927-1060 / Fax: 978-922-6430			
ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$				TITLE:			
TWO PLACE DECIMAL $\pm .01$				SMPM PCB MOUNT RECEPTACLE			
THREE PLACE DECIMAL $\pm .005$				MALE - SMOOTH BORE			
MAX CORNER BREAK $\approx .005$				7 POSITION			
XXX DENOTES CRITICAL DIMENSION				SIZE			
MATERIAL				A			
SEE TABLE 1				DWG: 8869000G91P-100			
FINISH				SCALE:			
SEE TABLE 1				OUTLINE			
FILE NAME: 8869000G91P-100				CODE ID - 00795			
PROPRIETARY AND CONFIDENTIAL				REV. -			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS MFG. CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA ELECTRONICS MFG. CORP. IS PROHIBITED.							