


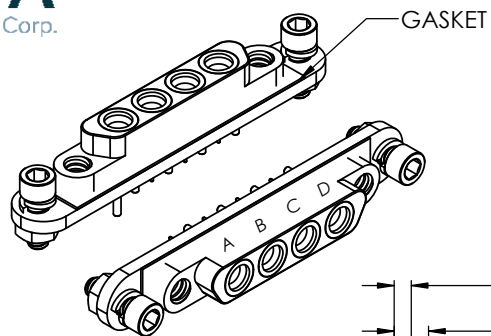

GROUND PAD
.003±.001 ABOVE [B]

DETAIL A
SCALE 6:1

4-40 UNC-2B
2 PLACES

Ø.094 THRU
2 PLACES

(.250)

SMPM - SMOOTH BORE
TYP - 5 PLACES

DELTA 8869000G91P-103

5X
Ø.030 ±.001

4X
Ø.012 ±.001

.138
TYP

.063 ±.002

.377 ±.002

.162 ±.002

.347 ±.002

.532 ±.002

.716 ±.002

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. ALL MOUNTING HARDWARE SHIPPED LOOSE.

BLOCK	1	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
BUSHING	4	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
INSULATOR	4	TORLON 4203 (POLYAMIDE-IMIDE) PER MIL-P-46179	N/A
PIN	5	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
CONTACT	4	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488
SCREW	2	18-8 STAINLESS STEEL	N/A
SPLIT LOCK	2	316L STAINLESS STEEL	N/A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS MFG CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA ELECTRONICS MFG CORP. IS PROHIBITED.

FILE NAME: 8869000G91P-102T

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ± 1/64
ANGULAR: MACH ± 1° BEND ± 1°
TWO PLACE DECIMAL ± .01
THREE PLACE DECIMAL ± .005
SURFACE FINISH = 63
MAX. CORNER BREAKS = .004

THIRD ANGLE
PROJECTION

MATERIAL
SEE TABLE

FINISH
SEE TABLE

SCALE: 3:1

NAME	DATE
ADK	2/21/2019
CHECKED	ADK
ENG APPR.	BJM

COMMENTS:

DELTA ELECTRONICS MFG CORP.
BEVERLY, MA 01915
www.deltatrf.com / Ph: 978-927-1060 / Fax: 978-922-6430

TITLE:
**SMPM PCB VERTICAL LAUNCH
MALE - SMOOTH BORE
4 POSITION**

SIZE B	DWG. NO. 8869000G91P-103	REV -
CODE ID - 00795	WEIGHT: 7.88 g	SHEET 1 OF 1