




1101-031-N003-1

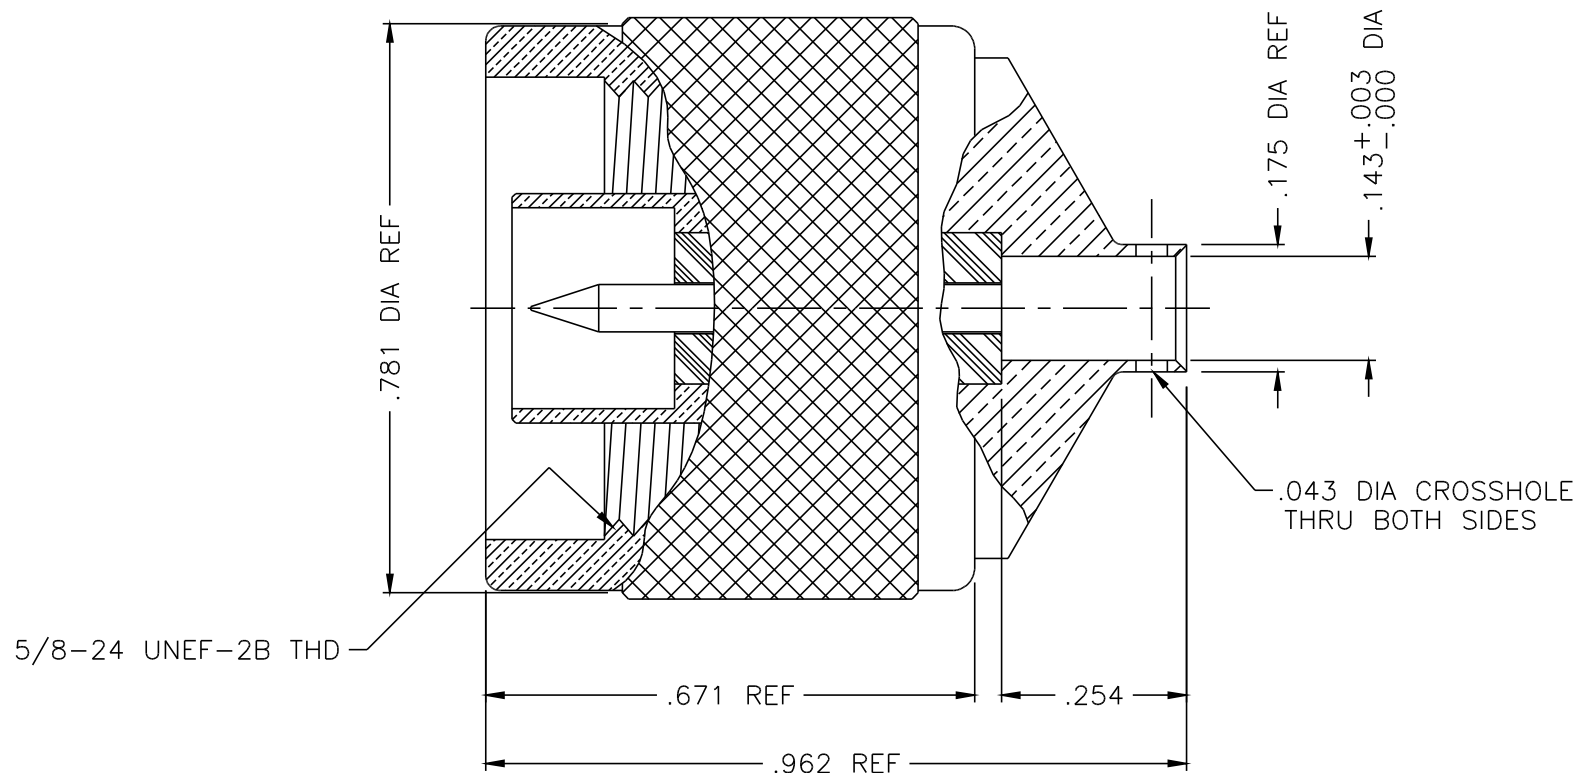

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: ALL METAL PARTS - BRASS PER ASTM B16, EXCEPT
LOCKING RING - BERYLLIUM COPPER, ASTM B196,
GASKET - SILICONE RUBBER PER ZZ-R-765,
INSULATOR - TEFLON PER ASTM D1710.
3. FINISHES: COUPLING NUT - NICKEL PLATE PER QQ-N-290
BODY & CONTACT - GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ± 0.005 , 2 PLACES = ± 0.02 , ANGLES = $\pm 1/2^\circ$

A	REVISED	DATE
-	OUTLINE	4/24/96
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915					
TITLE: 'N' (M) PLUG FOR .141 DIA (RG-402) SEMI-RIGID CABLE					
Drawn by BJM	Scale 4/1	Ckd. by	Engr Appd	FILE NAME: 1101031N003-001T	
5/25/00					

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

CODE IDENT.-00795

1101-031-N003-1