

DELTA
ELECTRONICS MFG. CORP

8628-000-G001-3

ELECTRICAL RATINGS

Insulation Resistance	5000 megaohms min.
Contact Resistance Center Conductor Outer Resistance	 6 Milliohms max. 2 Milliohms max.
DWV (@ Sea Level)	500 V rms min.
Working Voltage (@ sea level)	335 V rms max.
Frequency Range	0 – 40 GHz
Impedance	50 ohm

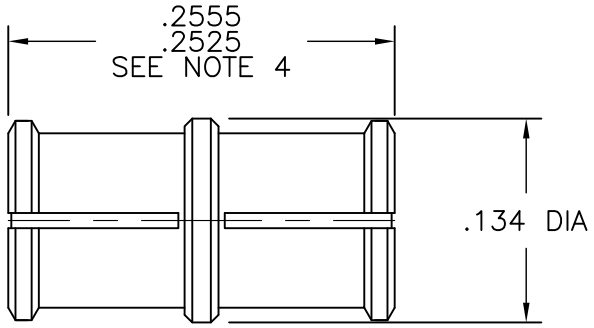

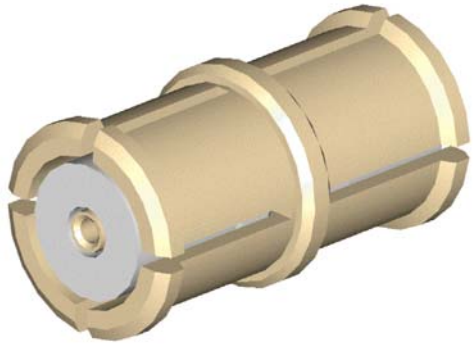

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & PIN – BERYLLIUM COPPER PER ASTM B16
   INSULATOR – TEFLON PER ASTM D1710
3. FINISHES: BODY & PIN – GOLD PLATE PER MIL-G-45204

–	OUTLINE	8/29/05
ALT.	REVISIONS	DATE

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ±.005, 2 PLACES = ±.02, ANGLES = ±1/2°, SURFACE FINISH = 63

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: SMP BULLET ADAPTER – JACK TO JACK – .254 (6 MM) LONG

Drawn by	Scale	Ckd. by	Engr Appd	FILE NAME:
BJM 8/29/05	8/1	BJM	MR	8628000G001-003.T

CODE IDENT.-00795

8628-000-G001-3