

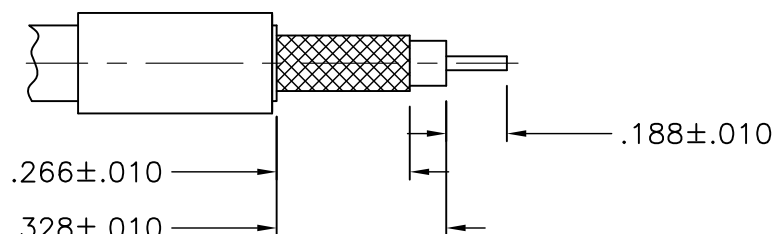


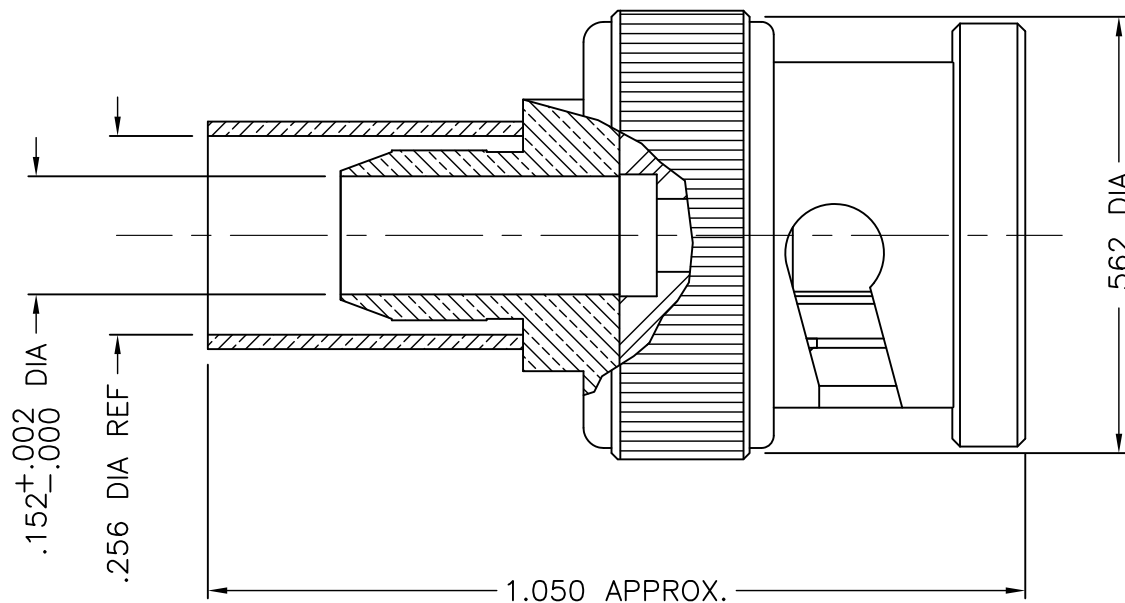

1003-020-N000-5

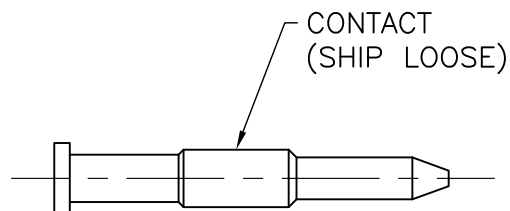

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: CONTACT & SPRING WASHER - BERYLLIUM COPPER PER ASTM B196.
INSULATOR - TEFLON PER ASTM D1710
GASKET - SILICONE RUBBER PER ZZ-R-765
CRIMP SLEEVE - D.H.P. COPPER CDA ALLOY 122
ALL OTHER METAL PARTS- BRASS PER ASTM B16
3. FINISHES: CONTACT - SILVER PLATE PER QQ-S-365
CRIMP SLEEVE - SULFAMATE NICKEL PLATE PER MIL-P-27418
ALL OTHER METAL PARTS - NICKEL PLATE PER QQ-N-290
4. CAN BE USED WITH AMP TOOL #220187-2, DIE SET 58435-1.

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$

-	OUTLINE	6/4/09
ALT.	REVISIONS	DATE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: 'BNC' CRIMP PLUG FOR RG-59,
59A, & 59B/U CABLES

Drawn by BJM 6/4/09	Scale 4/1	Ckd. by MR	Engr Appd MCD	FILE NAME: 1003020N000-005T
---------------------------	--------------	---------------	------------------	--------------------------------

CODE IDENT.-00795

1003-020-N000-5