

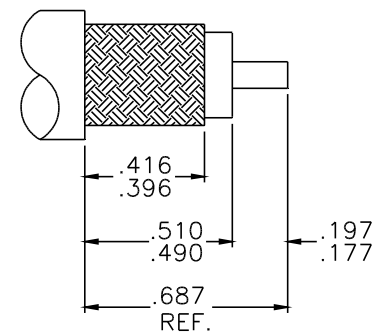


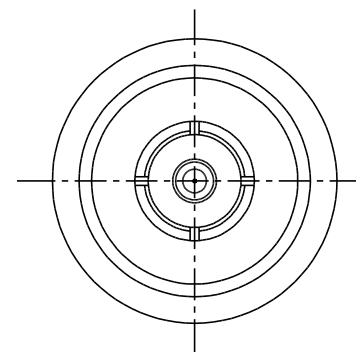

1103-004-N001-1

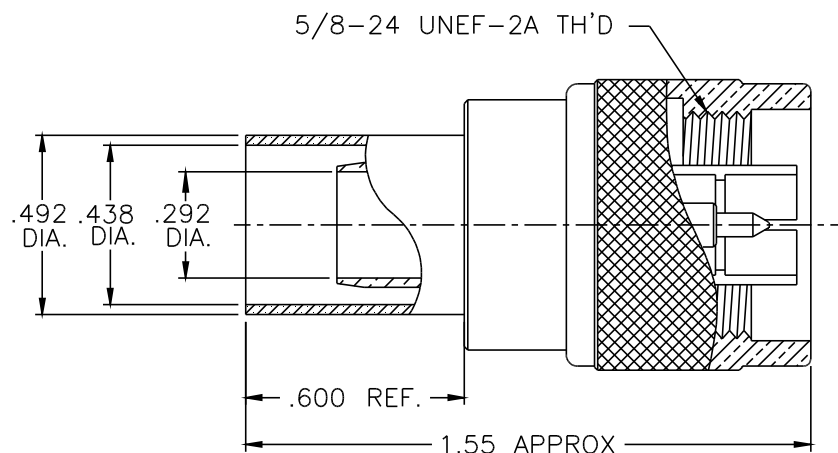

CABLE CUTTING DIMENSIONS

NOTES:

- CONNECTOR INTERFACE DESIGNED IN ACCORDANCE WITH MIL-STD-348.
- MATERIAL: INSULATOR: TEFLON / ASTM D1710  
GASKET: SILICONE RUBBER / ZZ-R-765.  
SNAP RING: PHOS. BRONZE / QQ-P-330.  
CRIMP SLEEVE: DHP COPPER.  
OTHER METAL PARTS: BRASS / ASTM B16
- CONTACT: GOLD PLATE / MIL-G-45204.  
ALL OTHER METAL PARTS: NICKEL PLATE / QQ-N-290.
- RECOMMENDED CRIMP TOOL: M22520/5-01  
WITH CRIMP DIE M22520/5-61 CLOSURE A  
(.429) HEX.

|       |           |         |
|-------|-----------|---------|
| -     | OUTLINE   | 2-20-96 |
| AL T. | REVISIONS | DATE    |

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES =  $\pm 0.005$ , 2 PLACES =  $\pm 0.02$ , ANGLES =  $\pm 1/2^\circ$

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

|                                                        |              |                 |           |                                |  |
|--------------------------------------------------------|--------------|-----------------|-----------|--------------------------------|--|
| DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915         |              |                 |           |                                |  |
| TITLE: 'N' CRIMP TYPE PLUG<br>FOR RG-214 & 393/U CABLE |              |                 |           |                                |  |
| Drawn by<br>nct<br>2-20-96                             | Scale<br>2/1 | Ckd. by         | Engr Appd | FILE NAME:<br>1103004N001-000T |  |
| CODE IDENT.-00795                                      |              | 1103-004-N001-1 |           |                                |  |