




1301-031-G003-3

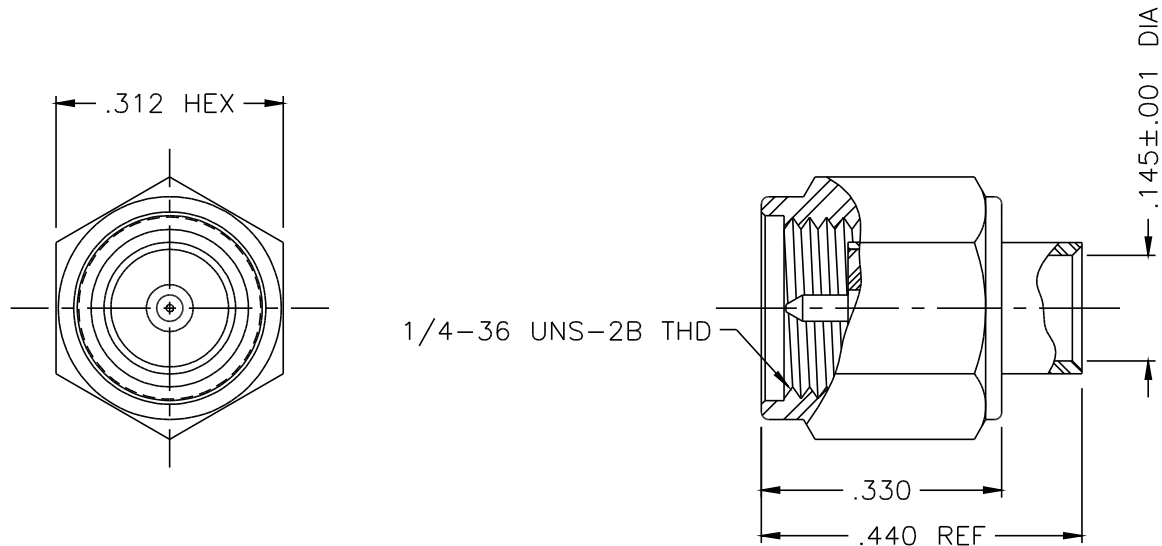

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & COUPLING NUT - CORROSION RESISTANT STEEL PER ASTM A582
CONTACT & LOCKING RING - BERYLLIUM COPPER PER ASTM B196.
GASKET - SILICONE RUBBER PER ZZ-R-765
INSULATOR - TEFLON PER ASTM D1710

3. FINISHES: BODY, CONTACT & COUPLING NUT - GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63

A	REDRAWN	10/9/00
-	OUTLINE	12/19/90
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: 'SMA' DIRECT SOLDER PLUG FOR .141 DIA SEMI-RIGID CABLE				
Drawn by BJM 10/9/00	Scale 4/1	Ckd. by	Engr Appd	FILE NAME: 1301031G003-003T
CODE IDENT.-00795		1301-031-G003-3		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.