



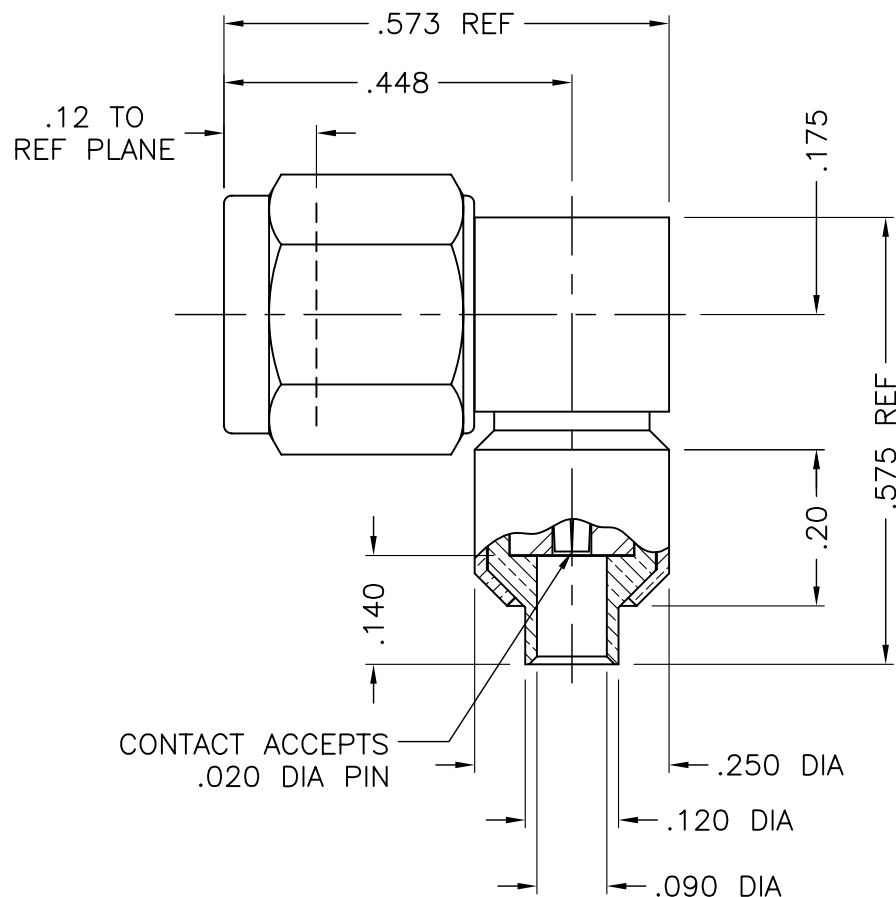

1305-094-K003-5

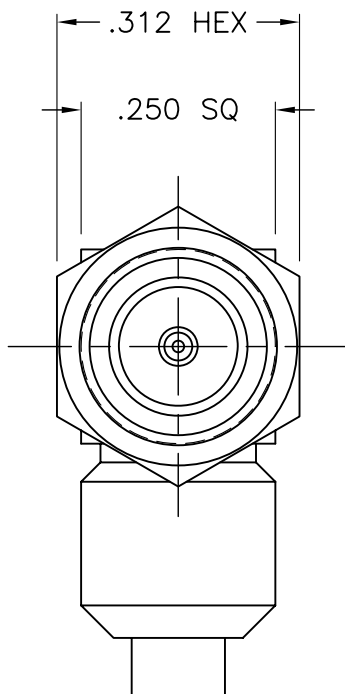

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.

2. MATERIAL: BODIES - BRASS PER ASTM B16
 CONTACT - BERYLLIUM COPPER PER ASTM B196.
 INSULATORS - TEFLON PER ASTM D1710
 GASKET - SILICONE RUBBER PER ZZ-R-765
 COUPLING NUT - CORROSION RESISTANT STEEL PER ASTM A582

3. FINISHES: COUPLING NUT - PASSIVATE PER QQ-P-35
 CONTACT & BODIES - GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ± 0.05 , 2 PLACES = ± 0.02 , ANGLES = $\pm 1/2^\circ$

A	REVISED	6/6/07
-	OUTLINE	9/18/97
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: 'SMA' (M) RT ANGLE ONE STEP PLUG
 FOR .085 SEMI-RIGID CABLE

Drawn by MJA 9/18/97	Scale 4/1	Ckd. by MR	Engr Appd MR	FILE NAME: 1305094K003-005T
----------------------------	--------------	---------------	-----------------	--------------------------------

CODE IDENT.-00795

1305-094-K003-5

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED
 OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.