




1308-037-G000

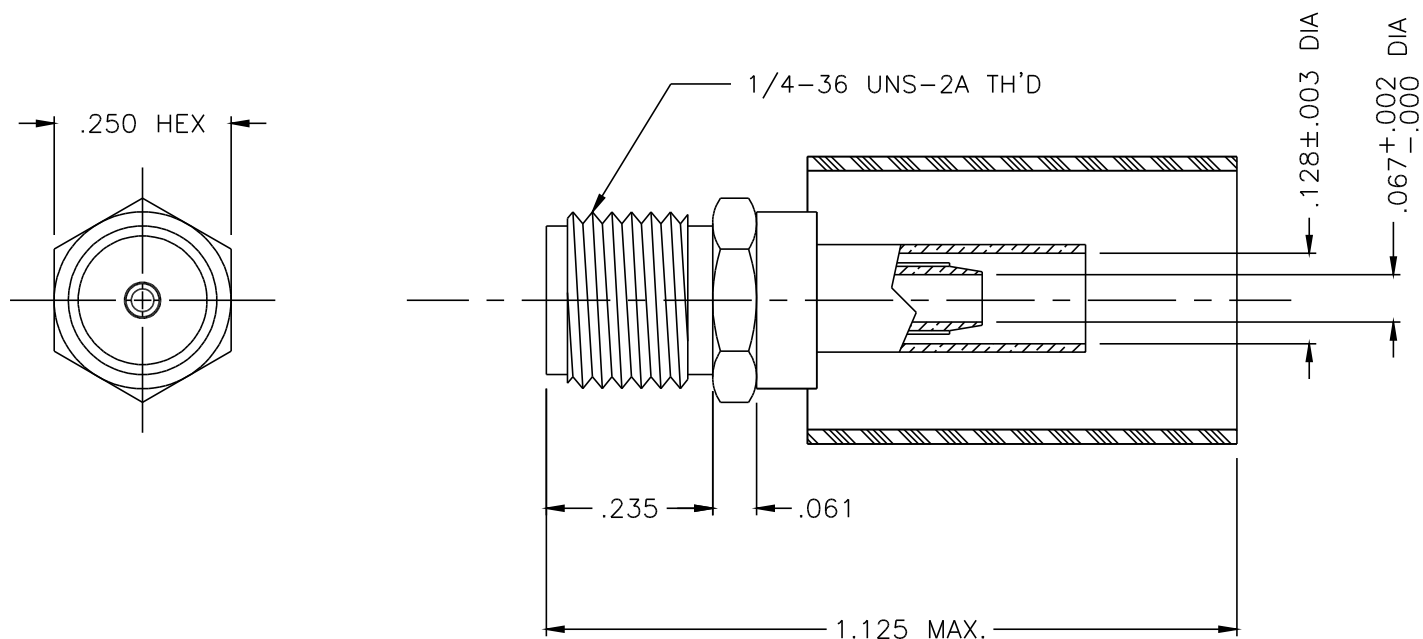

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY - CORROSION REISTANT STEEL PER ASTM A582
CONTACT - BERYLLIUM COPPER PER ASTM B196.
INSULATOR - TEFLON PER ASTM D1710
CRIMP SLEEVE - D.H.P. COPPER CDA ALLOY 122
SHRINK SLEEVE - SHRINKABLE POLYOLEFIN PER MIL-I-23053/5
3. FINISHES: BODY - GOLD PLATE PER MIL-G-45204
CONTACT - GOLD PLATE PER MIL-G-45204
CRIMP SLEEVE - GOLD PLATE PER MIL-G-45204

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: 'SMA' CRIMP JACK FOR
RG-174, 179, 188, 316/U CABLE

Drawn by BJM 7/9/01	Scale 4/1	Ckd. by	Engr Appd	FILE NAME: 1308037G000-000T
---------------------------	--------------	---------	-----------	--------------------------------

CODE IDENT.-00795

1308-037-G000

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ± 0.005 , 2 PLACES = ± 0.02 , ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.