




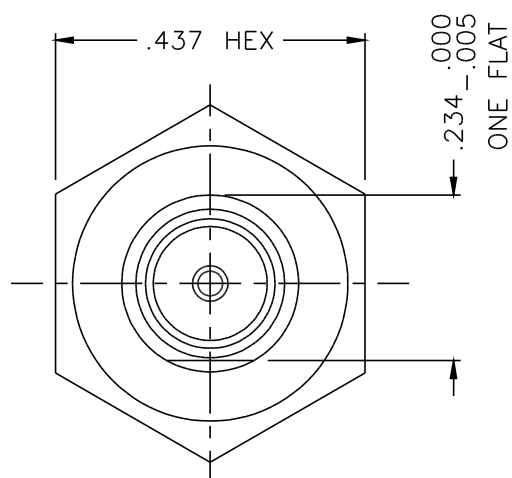

1317-025-G673-1



VIEW SHOWN WITHOUT
HEX NUT & LOCKWASHER

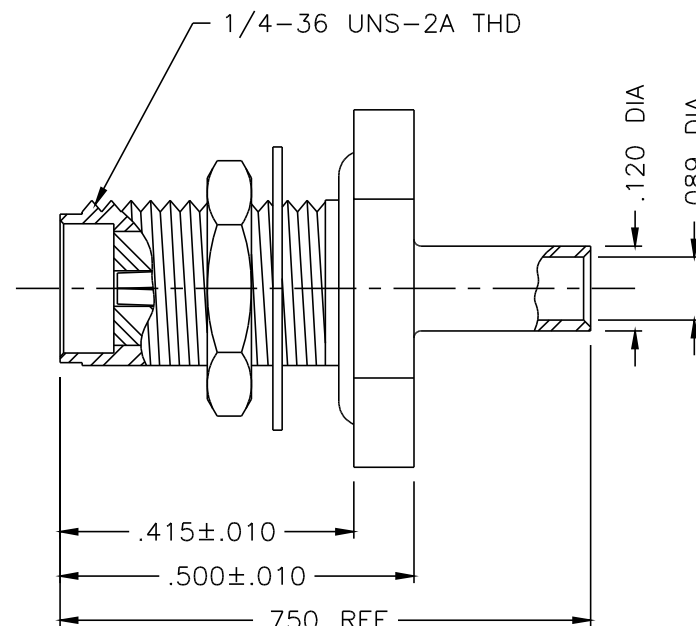

CABLE STRIP DIMENSIONS

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & HEX NUT- CORROSION RESISTANT STEEL PER ASTM A582
LOCKWASHER- SPRING STEEL
CONTACT- BERYLLIUM COPPER PER ASTM B196.
O-RING- SILICONE RUBBER PER ZZ-R-765
INSULATOR- TEFLON PER ASTM D1710
3. FINISHES: ALL METAL PARTS- GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ± 0.005 , 2 PLACES = ± 0.02 , ANGLES = $\pm 1/2^\circ$

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

ALT.	REVISIONS	DATE
-	OUTLINE	1/10/97

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: 'SMA' (F) BULKHEAD MOUNT JACK ONE STEP FOR .087 DIA SEMI-RIGID CABLE				
Drawn by MR	Scale 4/1	Ckd. by	Engr Appd	FILE NAME: 1317025G673-001T
1/10/97				
CODE IDENT.-00795		1317-025-G673-1		