


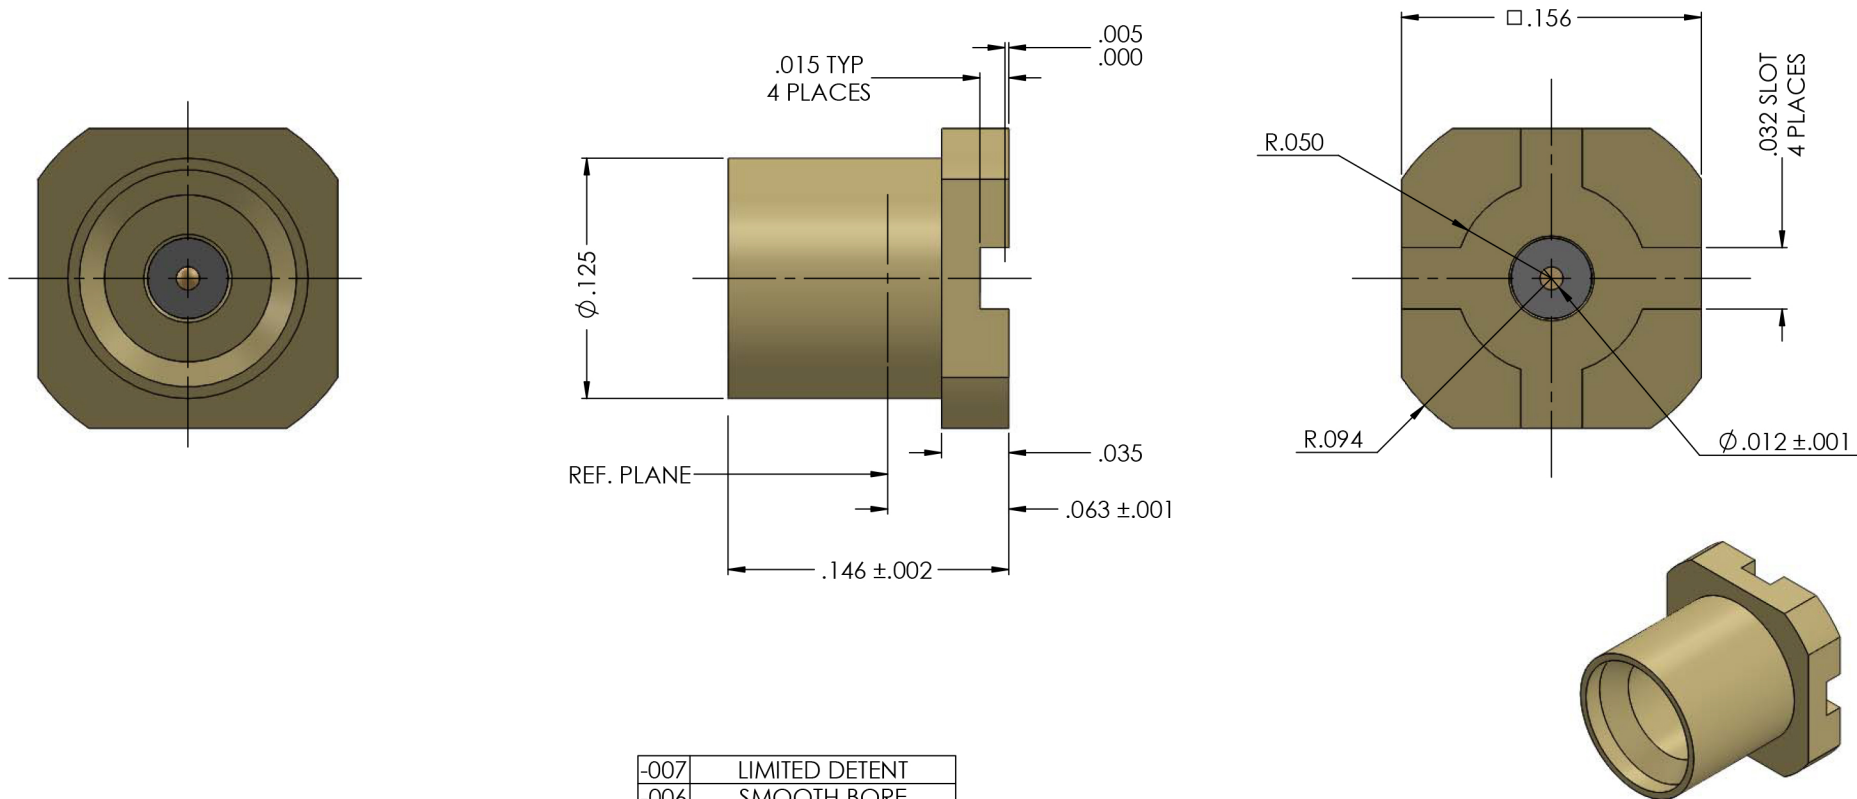

-007	LIMITED DETENT
-006	SMOOTH BORE
-005	FULL DETENT
*	SMP INTERFACE TYPE

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348

INSULATOR	TEFLON PER ASTM D1710, TYPE I, GRADE 1, CLASS A.	N/A
CONTACT	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488
BODY	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	GOLD PLATE PER ASTM B488
DESCRIPTION	MATERIAL	FINISH

Table 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS MFG CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

FILE NAME: 8868000G001-00ST

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/64$
ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$
TWO PLACE DECIMAL $\pm .01$
THREE PLACE DECIMAL $\pm .005$
SURFACE FINISH = 63
MAX. CORNER BREAKS = .004

THIRD ANGLE PROJECTION

MATERIAL

FINISH

SCALE: 15:1

NAME	DATE
DRAWN	BJM 1/1/2012
CHECKED	MR 1/1/2012
ENG APPR.	MR 1/1/2012

COMMENTS:

DELTA ELECTRONICS MFG CORP.
BEVERLY, MA 01915

www.deltar.com / Ph: 978-927-1060 / Fax: 978-922-6430

TITLE:

SMPM SURFACE MOUNT
MALE - POST CONTACT

SIZE	DWG. NO.	REV
B	8868000G001-*	-

CODE ID - 00795 WEIGHT: 0.00 lbs SHEET 1 OF 1