
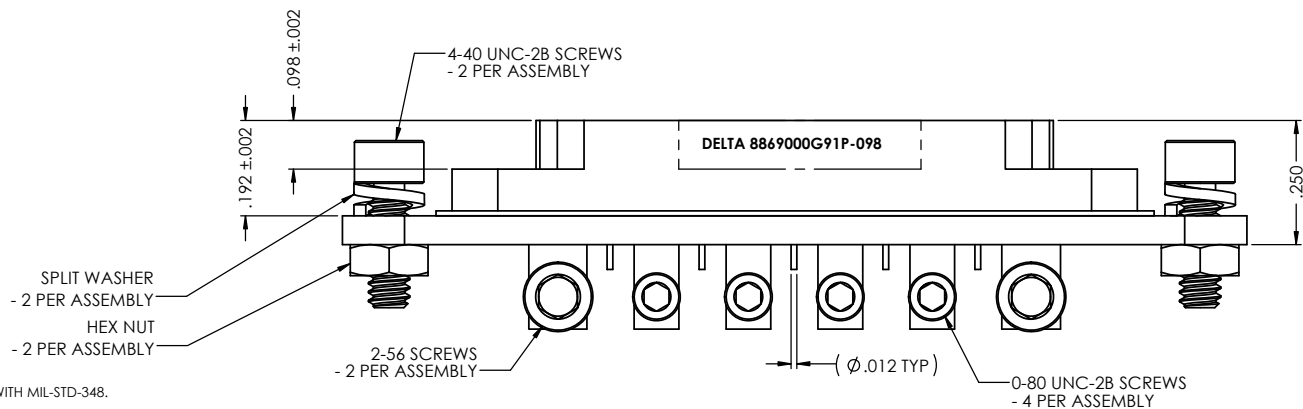
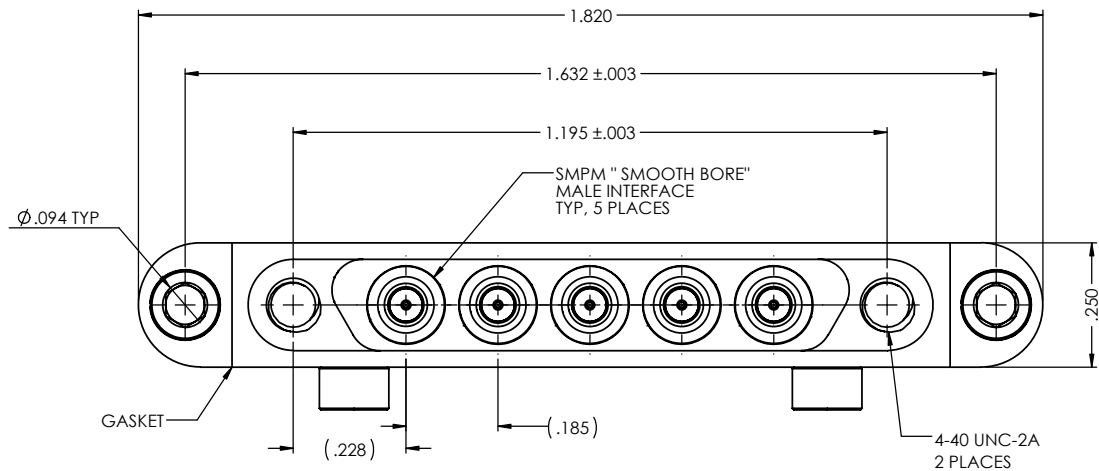


ROHS COMPLIANT

8869000G91P-098

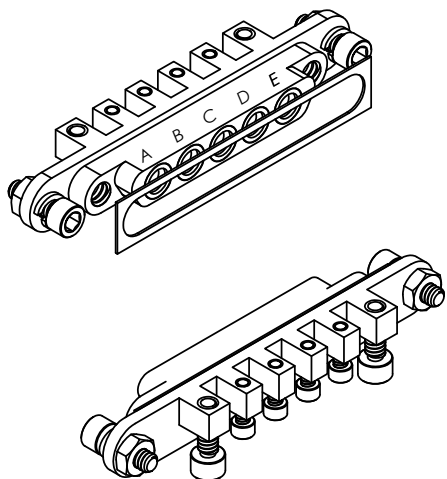

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. ALL MOUNTING SCREWS SHIPPED LOOSE.

SPLIT LOCK	316L STAINLESS STEEL	N/A
HEX NUT	18-8 STAINLESS STEEL	N/A
SCREW	18-8 STAINLESS STEEL	N/A
SCREW	18-8 STAINLESS STEEL	PASSIVATE PER SAE-AMS-2700
CONTACT	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488
BLOCK	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
GASKET	SILICONE RUBBER PER A-A-59588	N/A
INSULATOR	TORLON 4203 (POLYAMIDE-IMIDE) PER MIL-P-46179	N/A
BUSHING	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
DESCRIPTION	MATERIAL	FINISH

Table 1

DIMENSIONS ARE IN INCHES				DELTA ELECTRONICS MFG CORP.			
TOLERANCES:				BEVERLY, MA 01915			
FRACTIONAL: ±1/64				DRAWN	TS	2/22/2019	www.deltatrf.com / Ph: 978-927-1060 / Fax: 978-922-6430
ANGULAR: MACH ±1° BEND ±1°				CHECKED	ADK	2/22/2019	
TWO PLACE DECIMAL ±.01				ENG APPR.	BJM	2/22/2019	
THREE PLACE DECIMAL ±.005				MFG APPR.	MCD	2/22/2019	
MAX CORNER BREAK = .005				G.A.	MR	2/22/2019	TITLE: SMPM PCB MOUNT RECEPTACLE MALE - SMOOTH BORE 5 POSITION
XXX DENOTES CRITICAL DIMENSION				ENGINEERING DATA:			
MATERIAL SEE TABLE 1				WEIGHT (g): 11.40			
FINISH SEE TABLE 1							
FILE NAME: 8869000G91P-098				SIZE A DWG.-NO 8869000G91P-098			REV. -
				SCALE: OUTLINE			CODE ID - 00795
PROPRIETARY AND CONFIDENTIAL							
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS MFG. CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA ELECTRONICS MFG. CORP. IS PROHIBITED.							